


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

11

History of original corner establishment:

Corner not established in original survey

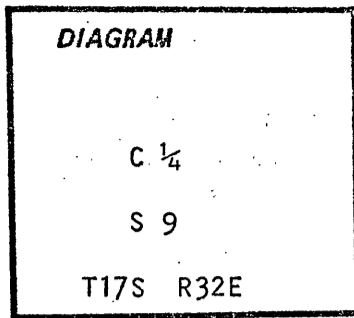

No record of subsequent monumentation found in County records
Description of corner evidence found:

NONE

See survey dated October, 1981
Description of monument and accessories I established to perpetuate the original location of this corner:


At corner point I set a 2 1/2 x 30 inch aluminum pipe with aluminum cap marked as shown 24 inches in the ground from which;

NEW BTs

A 24 inch P.Pine bears N8E, 56.4 feet marked X BT

A 20 inch P.Pine bears N53W, 60.7 feet marked C 1/4 S9 BT

Raised mound of stone

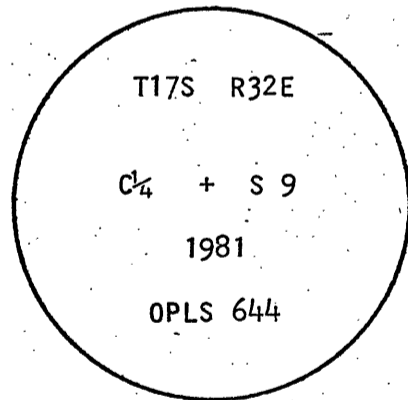

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert H. Griffin
OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Date. October 1, 1981
Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination in the establishment of accessories. New BTs measured to center of tree.

Office of *Surveyor* County of *Grant*
State of *Oregon* I hereby certify that the within instrument was filed in this office for record on the *23* day of *dec*, 19*81*
Robert H. Griffin by *Robert H. Griffin*
(COUNTY OFFICIAL) (DEPUTY)