


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

13  
14

History of original corner establishment:

Corner not established in original survey

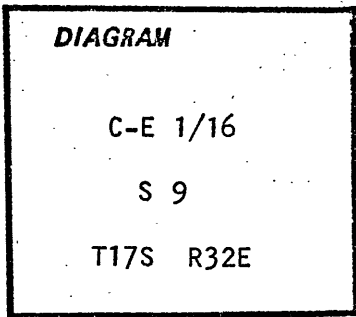

No record of subsequent monumentation found in County records

Description of corner evidence found:

NONE

See survey dated October, 1981

Description of monument and accessories established to perpetuate the original location of this corner:

At corner point I set a 2½ x 30 inch aluminum pipe with aluminum cap marked as shown 26 inches in the ground from which;

NEW BTs

A 40 inch P.Pine bears N80E, 12.4 feet marked CE1/16 S9 BT


A 10 inch P.Pine bears S29W, 29.7 feet marked CE1/16 S9 BT

Raised mound of stone

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Robert D. Bageot*

OREGON  
JULY 10, 1954  
**DUANE I. GRIFFITH**  
644

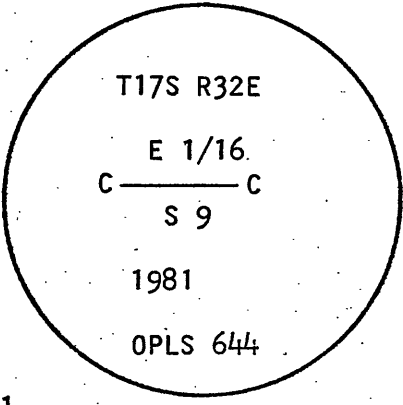

Date. October 1, 1981

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination in the establishment of accessories. New BTs measured to center of tree.

Office of Surveyor County of Grant  
 State of Oregon, I hereby certify that the within instrument was filed in this office  
 for record on the 3 day of Dec, 1981  
Robert D. Bageot by \_\_\_\_\_  
 (COUNTY OFFICIAL) (DEPUTY)