

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


32

History of original corner establishment:

Corner established in 1884 by Henry W. Cooke under General Land Office contract #494

Surveyor General record states;

Set basalt stone 14x12x10 for cor. marked with 4 notches on the S. and E. edges and raised mound of stone 2 ft. high and 4½ ft. base alongside

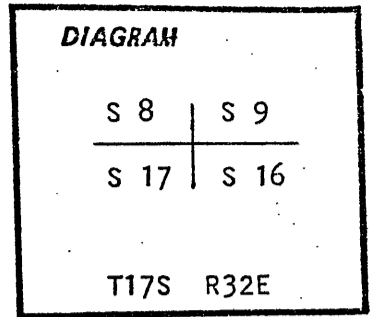

No record of subsequent remonumentation was found in the County records
Description of corner evidence found:

Found stone 12x12x9 marked with 4 notches and 4 notches in mound of stone

See map of survey dated October 1981

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of stone I set a 2½ x 30 inch aluminum pipe with aluminum cap marked as shown 28 inches in the ground from which;

NEW BTs


A 18 inch P.Pine bears N82E, 405.0 feet marked T17S R32E S9 BT

A 10 inch P.Pine bears S10E, 439.0 feet, marked T17S R32E S16 BT

NO other trees available

Raised mound of stone 4 ft. at the base to the top of cap

Buried stone South and alongside of pipe

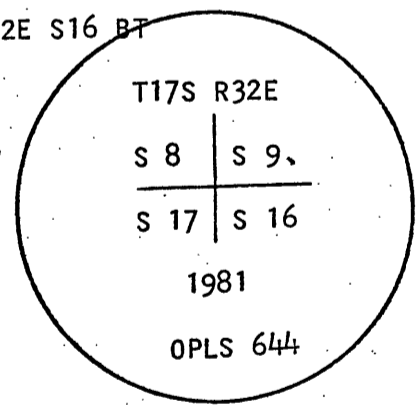

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Date. September 9, 1981

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 21° East declination in the establishment of accessories. Original BTs measured to face of blaze. New BTs measured to center of tree.

Office of..... Surveyor County of..... Grant

State of..... Oregon, I hereby certify that the within instrument was filed in this office for record on the..... 23 day of..... Sept, 19..... 81

..... Robert L. Berger by.....

(COUNTY OFFICIAL) (DEPUTY)