

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

56
3


History of original corner establishment:

Corner established in 1884 by Henry W. Cooke under General Land Office contract #494

Surveyor General record states;

Set basalt stone 16x14x14 ins. for 1/4 sec.cor. marked 1/4 on the N. face, from which:

- A Pine 36 ins. diam. bears N45W, 3 lks.
- A Pine 36 ins. diam. bears S80E, 121 lks.

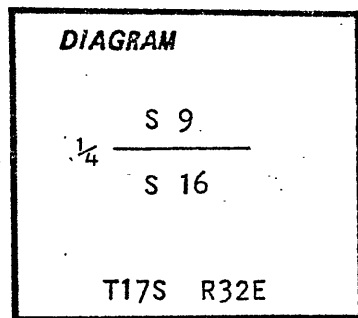

No record of subsequent remonumentation was found in the County records

Description of corner evidence found:

Found stone 16x8x4 marked 1/4, stone is broken
Found 2 BTs

See map of survey dated October 1981

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of stone I set a 2 1/2 x 30 inch aluminum pipe with aluminum cap marked as shown 28 inches in the ground from which;

ORIGINAL BTs


- A 36 inch P.Pine bears S85E, 80.5 feet, live and vigorous, blaze evident, did not open
- A 34 inch P.Pine bears N45W, 2.0 feet, dead and down, scribes visible

NEW BT

A 14 inch P.Pine bears North, 74.5 feet, marked 1/4 S9 BT

Buried stone East and alongside pipe

Raised mound of stone

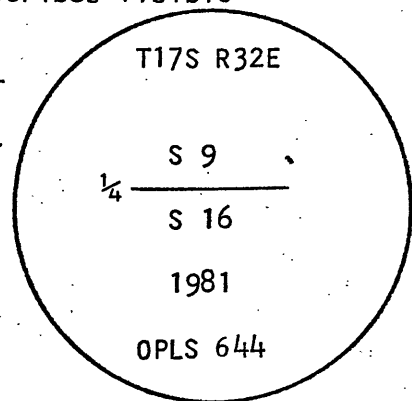

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON JULY 10, 1964 DUANE I. GRIFFITH 644

Date. September 12, 1981

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 21° East declination in the establishment of accessories. Original BTs measured to face of blaze. New BTs measured to center of tree.

Office of... Surveyor... County of... Grant

State of... Oregon... I hereby certify that the within instrument was filed in this office

for record on the... 23 day of... Sept... 1981

Robert D. DeJongh by

(COUNTY OFFICIAL)

(DEPUTY)