

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Corner established in 1884 by Henry W. Cooke under General Land Office contract #494

Surveyor General record states;

Set basalt stone 18x10x5 inches for 1/4 sec.cor. marked 1/4 on the W face from which;

A Pine 30 ins. diam. bears S12E, 56 lks.

A Pine 18 ins. diam. bears S25W, 42 lks.

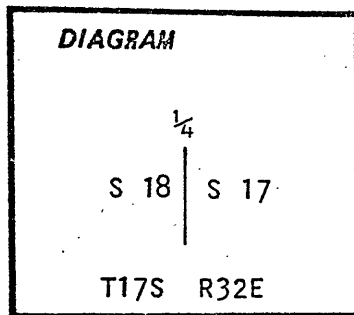

No record of subsequent remonumentation was found in the County records

Description of corner evidence found:

Found both BTs-- did not find stone. The area has been disturbed by logging

See map of survey dated October 1981

Description of monument and accessories I established to perpetuate the original location of this corner:

At record distances from the original BTs I set a 2 1/2 x 30 inch aluminum pipe with aluminum cap marked as shown 26 inches in the ground from which;


ORIGINAL BTs

A 3/4 inch P.Pine bears S9E; 37.0 feet, live and vigorous, scribes visible
A 2/4 inch P.Pine bears S25W, 27.7 feet, scribes visible (stump)

NEW BT

A 1/4 inch P.Pine bears N62W, 39.9 feet, marked 1/4 S18 BT

Raised mound of stone

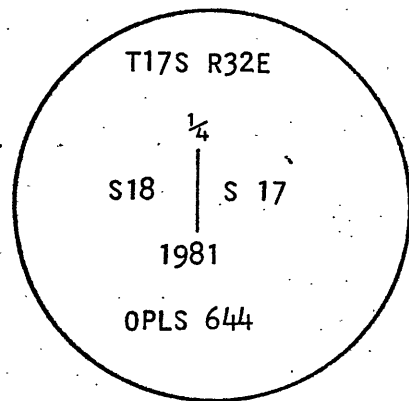

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane I. Griffith
OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Date, September 13, 1981

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 21° East declination in the establishment of accessories. Original BTs measured to face of blaze. New BTs measured to center of tree.

Office of..... *Surveyor* County of..... *Grant*
State of..... *Oregon* I hereby certify that the within instrument was filed in this office
for record on the..... *23* day of..... *Dec* 19..... *81*
Robert D. Buehler by
(COUNTY OFFICIAL) (DEPUTY)