


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

19

History of original corner establishment:

Corner not established in original survey

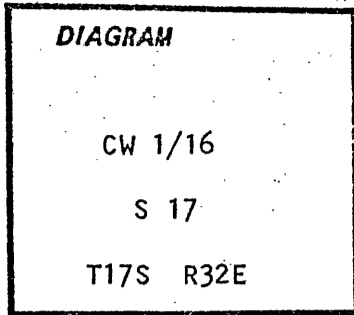

No record of subsequent monumentation found in County records
Description of corner evidence found:

NONE

See survey dated October, 1981
Description of monument and accessories I established to perpetuate the original location of this corner:


At corner point I set a 2½ x 30 inch aluminum pipe with aluminum cap marked as shown 25 inches in the ground from which;

NEW BTs

A 10 inch red fir bears S71E, 24.2 feet marked CW 1/16 S17 BT

A 26 inch P.Pine bears S70W, 16.3 feet marked CW1/16 S17 BT

Raised mound of stone

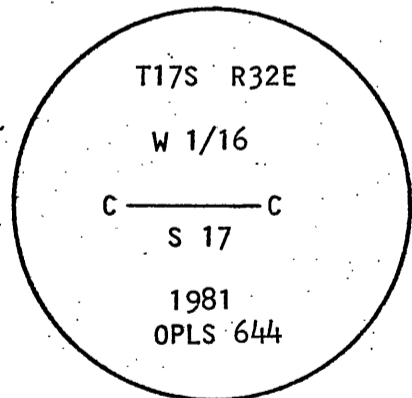

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Date. October 3, 1981

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination in the establishment of accessories. New BTs measured to center of tree.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 23 day of Dec., 1981
Robert H. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)

45 L-6