


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The original corner was established in 1884 by Henry W. Cooke.

Set a basalt stone 14x14x10 ins. 9 ins in the ground for 1/4 sec cor marked 1/4 on N. face from which

An aspen 6 ins diam bears S 65 E, 63 lks dist marked 1/4SBT.
A pine 38 ins diam bears N 6 W, 189 lks dist marked 1/4SBT.

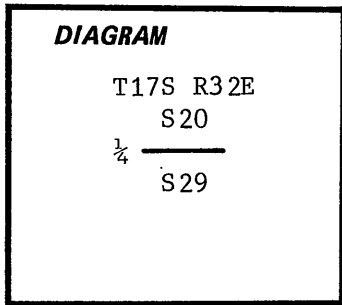

Description of corner evidence found:

Found no trace of the original monument. Found one original bearing tree, a 47" pine marked 1/4S in an opened face. The corner position falls on a steep southwesterly slope and the stone may have rolled downhill.

Description of monument and accessories established to perpetuate the original location of this corner:

Set a 3 1/4" x 30" aluminum monument with magnet 20" in the ground in a mound of stone at record distance and direction from the BT.

12" Ponderosa Pine bears S 37 1/4 E, 65.0 feet scribed 1/4S29BT.
12" Ponderosa Pine bears N 41-3/4 W, 39.5 feet scribed 1/4S20BT.

Bearing trees have a 3/4" brass washer marked "LS 1918" attached to the BT. Painted faces and bands red on the BTs and attached Attention signs and Bearing tree tags. Bearing tree measurements were made to the center of the tree, except the original pine, for which the measurement was made to the face of the scribing.

Set a steel fence post with Attention sign West 3 feet.


Work performed 13 May 1985
Witness: Louise H. Parsons

Tyler B. Parsons, PLS 1918
1915 SE Stone Street
Corvallis, OR 97333
(503) 752-7515

Road Cadastral Survey, Cont, No. 53-04H1-4-9665N

CAP MARKED

T17S R32E
S20
1/4 ———
S29
PLS 1918
1985

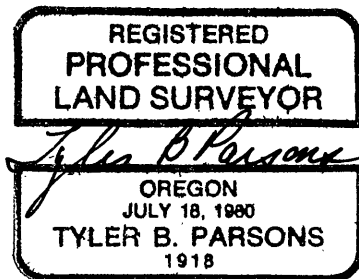

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 19 day of June, 1985
Robert O. Sargent by _____
 (COUNTY OFFICIAL) (DEPUTY)