


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The original corner was established in 1884 by Henry W. Cooke.

Set a basalt stone 16x14x10 ins 10 ins in the ground for cor to secs 29,30,31 & 32. marked with 1 notch on the S. and 5 notches on the E. edges and raised a mound of stone 2 ft high and 4½ ft base alongside.



Description of corner evidence found:

Found a 19x10x8 stone with 1 groove on the south face and 5 grooves on the west face, in a mound of stones.

Description of monument and accessories | established to perpetuate the original location of this corner:

Set a 3¼" x 30" USDA aluminum monument with magnet 20" in the ground in a mound of stone. Placed the original stone in the mound.

CAP MARKED

T17S R32E	
S30 S29	
S31 S32	
PLS 1918	
1985	

Set a 2" aluminum cap on rebar N 45 W, 25.0 feet stamped T17S R32E S30 RM S45E 25.0 PLS 1918 1985.

Set a 2" aluminum cap on rebar N 45 E, 25.0 feet stamped T17S R32E S29 RM S45W 25.0 PLS 1918 1985.

Set a 2" aluminum cap on rebar S 45 E, 25.0 feet stamped T17S R32E S32 RM N45W 25.0 PLS 1918 1985.

Set a 2" aluminum cap on rebar S 45 W, 25.0 feet stamped T17S R32E S31 RM N45E 25.0 PLS 1918 1985.


Set a steel fence post with Attention sign North 3 feet.

Work performed 14 May 1985

Witness: Louise H. Parsons

Tyler B. Parsons, PLS 1918
1915 SE Stone Street
Corvallis, OR 97333
(503) 752-7515

Road Cadastral Survey, Cont No 53-04H1-4-9665N

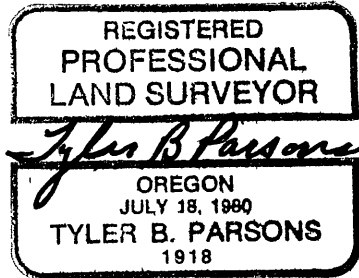

Office of.....*Surveyor*..... County of.....*Grant*.....
 State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
 for record on the.....*19* day of.....*June*....., 19.....*85*
Robert W. Dwyer by.....
 (COUNTY OFFICIAL) (DEPUTY)