


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The original corner was established in 1883 by Henry W. Cooke under Contract No. 488. The original notes state:

"Set basalt stone 16x16x5 ins - 10 ins in the ground for 1/4 Sec. cor. marked 1/4 on the W. face - and raised a mound of stone alongside."

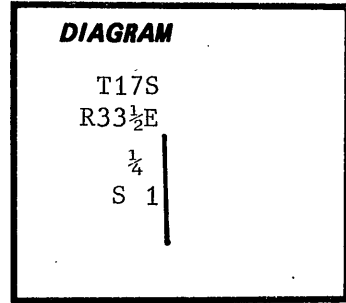

Description of corner evidence found:

Found a 16x8x7 stone with a distinct 1/, and an indistinct 4, on the west face, in a small ring of stone, with a mound of stone to the West.

Description of monument and accessories established to perpetuate the original location of this corner:

Set a 3 1/4" x 30" aluminum monument 18" in the ground in a mound of stone, and placed the original monument in the mound.

Marked a 13" Ponderosa Pine S58 1/4°W, 160.6 ft, scribed 1/4S1BT, with a 3/4" brass washer marked "LS 1918".

Marked a 12" Ponderosa Pine N56-3/4°W, 130.9 ft, scribed 1/4S1BT, with a 3/4" brass washer marked "LS 1918".

Painted faces and bands red and attached appropriate USFS signs to BTs.

Set a steel fence post North 3 ft, with an Attention sign.

Basis of Bearings - solar observation.


Work performed 6/20/85.

Witnesses: Louise H. Parsons, Douglas T. Parsons.

Road Cadastral Survey for the USDA, Forest Service.

T17S
R33 1/2 E
1/4
S 1
PLS 1918
1985

Tyler B. Parsons
Professional Land Surveyor
1915 S.E. Stone St.
Corvallis, OR 97333
(503) 752-7515

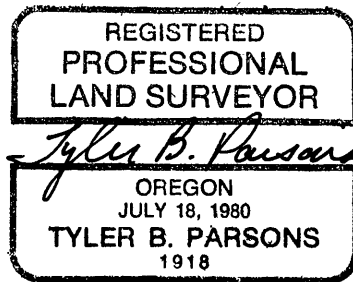

Office of Surveyor County of Grant
 State of Oregon hereby certify that the within instrument was filed in this office
 for record on the 22 day of July, 1985
Robert D. Dugan by _____
 (COUNTY OFFICIAL) (DEPUTY)