RECEIVED AND
FILED
JUN 14 1973
JOHN L. VEIRA, County Clerk
By Betty Soares, Deputy

CORNER RESTORATION

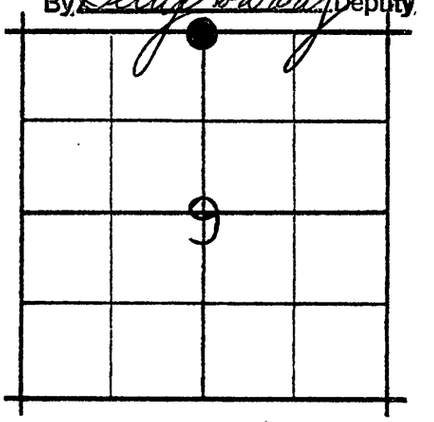

CORNER N.1/4 cor. Sec.9 TWP 17S RANGE 28E., W.M.

ORIGINAL SURVEY BY: Henry W. Cooke

CONTRACT NUMBER: 427

CONTRACT DATE: October 15,1881

ORIGINAL DESCRIPTION:

40.10 Set post 3½ ft. long 3 ins. square with marked stone 12 ins. in the ground for 1/4 sec. cor. marked 1/4 S on N face, from which
A pine 42" diam bears S 42°W, 95 lks. dist mkd. 1/4 S BT.
A pine 48 ins. diam. bears N.10°W., 111 lks. dist., marked 1/4 S BT.

RESTORATION BY, STAMP AND DATE:

REGISTERED PROFESSIONAL LAND SURVEYOR
Robert D. Bagett
OREGON JULY 12, 1963 ROBERT D. BAGETT 598

April 29,1973

EVIDENCE FOUND:

Found the two original bearing trees, and established the corner at record distance from them.
FROM THE CORNER POINT; the original bearing trees:

A live 50" pine bears S48°W., 62.7 ft., with old blaze completely healed over. I did not reopen blaze.

A 50" pine stump bears N13°W, 73.3 ft, marked 1/4 S BT.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

Set a 1½"x36 " iron pipe 20" in the ground, with brass cap marked as shown.
from which NEW BEARING TREE:
A 11" pine bears North 11.4 ft. marked 1/4 S4 CS BT.

This corner is 3 feet South of a East-West fenceline.
Used Compass with 20° East variation, and steel tape.

Measurements were taken to the face of the blaze on the BT.

MONUMENT MARKED
GRANT COUNTY T17S R28E 1/4 S 4 S 9 1973 PLS 598 SURVEYOR

Complete and File with Office of the Grant County Surveyor, Grant County, Oregon, Courthouse, Canyon City, Oregon 97820

E-11