CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Originally established by Henry W. Cooke in 1882 under Contract number 427, dated December 15, 1881.

Surveyor General's Records state :-

Set a Basalt stone 16x14x5 ins, 11 ins. in ground for 1/4 sec cor marked 1/4 on N. face and raised a mound of stone alongside.



Description of corner evidence found:

I found a stone 18x14x6 marked 1/4 in a mound of stone

Description of monument and accessories I established to perpetuate the original location of this corner:

At the location of the marked stone I set a standard F.S. aluminum monument consisting of a 3" disk mounted on a 2x30" pipe with a 4x4½" footplate, buried upright in the ground 18" with the original corner rock buried alongside, all surrounded by a large mound of stone. The disk on the monument is stamped as shown.

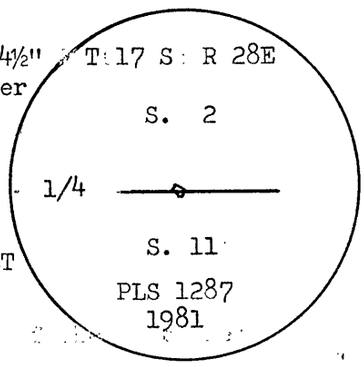

From this monument :-

A 16" PP bears S. 51° E., 17.7 ft distant, scribed 1/4 S 11 BT
A 16" PP bears N. 04°30' W. , 66.2 ft distant, scribed 1/4 S 2 BT

Both BT are banded with red paint, carry BT signs and Attention signs, and have a brass disk stamped PLS 1287 nailed at the base of the BT Blaze

Monument set 7/20/81

Witness: P. Zabala

Monument set as part of U.S. Forest Service "Three Piece" cadastral survey, see Survey Plat dated Nov. 1981, Grant County Survey Plat No. 708.

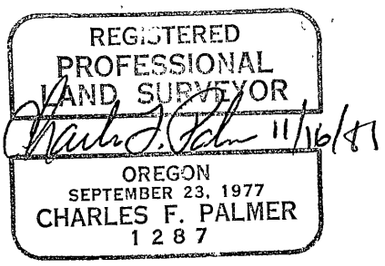

Office of Surveyor *County of* Grant
State of Oregon *, I hereby certify that the within instrument was filed in this office for record on the* 18 *day of* Nov *, 19* 81
Charles D. Daggett *by* .....
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

☆GPO—798-276