CERTIFIED RECORD OF LAND CORNER MONUMENTATION

INDEX No.L-17

History of original corner establishment:
This corner was originally established by William R. Gradon in 1884 under GLO Contract Number 497. Surveyor General Field Notes State:

Set basalt stone 12x8x6 ins 8 ins in the ground for 1/4 sec cor. Marked 1/4 on west face and raised a mound of stone alongside.

DIAGRAM



Description of Corner Evidence Found:
Found stone, 12"x8"x6", marked 1/4 on west face, set alongside a mound of stone.

Description of monument and accessories I established to perpetuate the original location of this corner:
At position of the original stone,
Set 2-1/2"x30" aluminum pipe with 3-1/4" aluminum cap, stamped as shown on the diagram, 15" in the ground, and a raised a 3-1/2 ft dia. x 1-1/2 ft high mound of stone around pipe. Placed original stone in mound to the north of the pipe.

From Which:

Set four, 5/8"x30" iron pins with plastic caps marked PLS 848 at the following bearings and distances:

N45°W, 30.2 ft., no marks
N45°E, 28.3 ft., marked with one groove in top of pin.
S45°E, 31.2 ft., marked with two grooves in top of pin.
S45°W, 27.9 ft., marked with three grooves in top of pin.

Measurements to accessories taken with a magnetic compass, declination 17°east, and a nylon clad steel tape. Set steel fence post with Land Survey Monument sign 5'north.

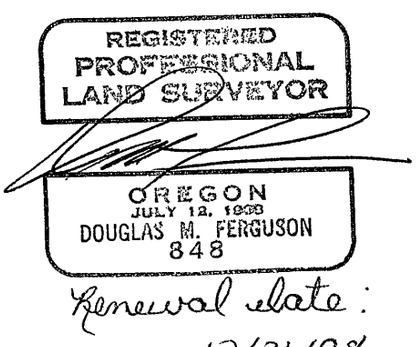

Renewal date:
12/31/98

This work was performed by:
Douglas M. Ferguson, PLS 848
Witnessed by: D. Mitchell Ferguson and Brad Cates
Date: 9-28-95
Refer to Grant County Map of Survey No. 1462

Office of Surveyor County of Grant
State of OR I hereby certify that the within instrument was filed in this office for record on the 2 day of Feb, 1998
Robert D Bagett by
(COUNTY OFFICIAL) (DEPUTY)

L-17