


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by George H. Thurston, Deputy Surveyor, under GLO Contract No. 191, dated June 23, 1873.



Surveyor Generals Records state:

Set a basalt stone 16x14x10 ins., 7 ins. in ground.
Deposited marked stone for $\frac{1}{4}$ sec. cor.

No record of subsequent remonumentation found in county records.

Description of corner evidence found:

Found the original corner stone, a basalt stone 15x7x11, properly marked and set in ground at the corner of barbed wire fences running North, South, and West.

Description of monument and accessories established to perpetuate the original location of this corner

At the corner point: Set a $2\frac{1}{4}$ x30 inch iron pipe 28 ins. in the ground, with brass cap marked as shown.

from which NEW BEARING TREES:

A Pine, 13 ins. diam., bears S.85°E., 31.8 ft., marked
T18S R27E $\frac{1}{4}$ S30 BT.

A Pine, 17 ins. diam., bears N.53°W., 26.0 ft., marked
T18S R26E $\frac{1}{4}$ S25 BT.

I buried the original cor. stone East & alongside the iron pipe and raised a mound of stone to top of pipe.

I set a steel fence post 5 ft. South of of pipe and attached USFS signs to it.


I nailed brass washer, marked "OPLS 598", to BT blazes.

Used steel tape and magnetic compass with 20° East variation.
Measured to the center of the new BTs.

See Map of Survey No. 380. This cor. set August 22, 1975.

Office of..... County Surveyor..... County of..... Grant
Oregon
State of....., I hereby certify that the within instrument was filed in this office
for record on the 9th day of September, 1975, at 2:28 o'clock P.M., (signed)
Robert D. Baggett by.....
(COUNTY OFFICIAL) (DEPUTY)

Witness: John Loveira
County Clerk

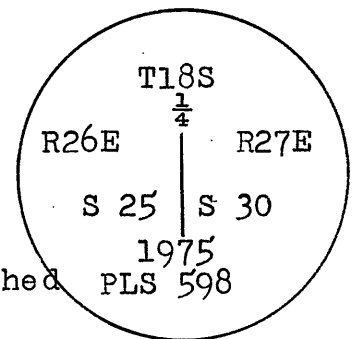

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Baggett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598