

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner set by Alonzo Gesner under contract No. 206, bearing date of July 14, 1874

Surveyor General records state

Set stone 14 x 12 x 8 for corner to Secs. 29, 30, 31 & 32

No BT's set

No record of restoration

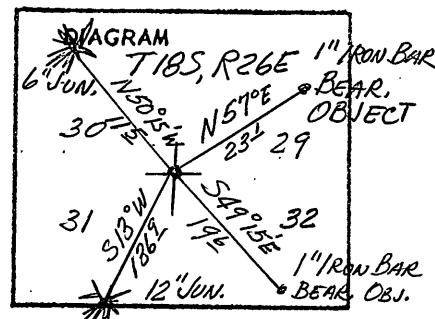

Description of corner evidence found:

Found rock 14 x 9 x 6 plainly marked with a single groove on one face. Corner is at an old fence post which was obviously an old fence corner post.

Description of monument and accessories established to perpetuate the original location of this corner

I set a standard F.S. corner furnished by the Forest Service consisting of a 3" disk mounted on a 2" x 30" pipe with a 5x5" footplate, all aluminum, buried 22" in the ground and 8" above the ground, with a mound of dirt and rock around it. Original rock is buried alongside the corner; from which

A Western Juniper 6" in diam. bears N. 50°15' W. a distance of 11.5 feet, scribed S30
T18S R26E BT

a Western Juniper 12" in diam. bears S. 13°W. a distance of 136.9 feet, scribed S31
T18S R26E BT


Both BT's bear a BT sign, a brass disk at base of BT blaze stamped PLS 350, and are banded with red paint.

In addition Bearing Objects, consisting of a 1" x 30" iron bar were driven into the ground as follows:

An iron bar bears N. 57° E. a distance of 23.1 feet,

An iron bar bears S. 49°15' E. a distance of 19.6 feet

In addition to the lettering cast in the cap (disk), it is stamped as illustrated.



Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 25 day of July, 1978, at 12 o'clock A.m., (signed)
Robert D. Beggs by _____
(COUNTY OFFICIAL) (DEPUTY)

attest: John L. Pereira
County Clerk

