


CERTIFIED RECORD OF LAND CORNER MONUMENTATION**History of original corner establishment:**

Original corner set by Alonzo Gesner under contract no. 206 bearing date of July 14, 1874

Surveyor General's notes (records) state
"Set stone 16 x 12 x 4 for 1/4 Sec. Cor."

No BT's

No record of restoration

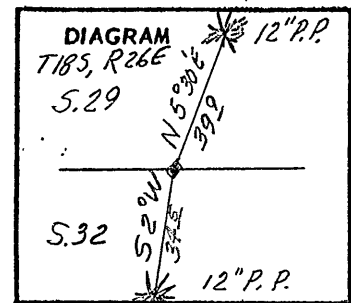**Description of corner evidence found:**

Searched for, not found


Description of monument and accessories I established to perpetuate the original location of this corner

I set a standard F.S. corner all aluminum, 3" disk on 2" x 30" pipe with a 5" x 5" footplate buried 20" in ground, surrounded by a mound of rock and dirt; from which


A P.P. 12" in dia. bears N. 5°30' E. a distance of 39.9 feet, scribed 1/4 S29 BT

A P.P. 12" in dia. bears S. 2° W. a distance of 34.5 feet, scribed 1/4 S32 BT

Both BT's bear a BT sign, a brass washer stamped PLS 350, and a band of red paint



3" disk on pipe at corner stamped as shown

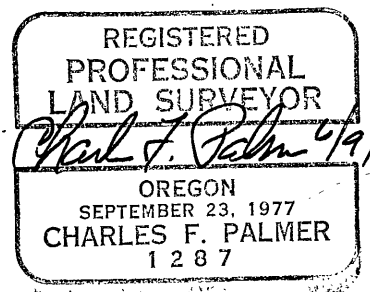

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 25 day of July, 19 78, at 10 o'clock A.m., (signed)
Robert D. Bayless by _____
(COUNTY OFFICIAL) (DEPUTY)

Attest: John Luviera
County Clerk