


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: CORNER WAS ESTABLISHED IN AUGUST 1874 BY ALONZO GESNER UNDER GENERAL LAND OFFICE CONTRACT NO. 206.

SURVEYOR GENERAL RECORDS STATES:
SET 12" X 10" X 8" STONE FOR CORNER TO
SECTIONS 28, 29, 32 & 33.

NOTE: NO BEARING TREES
NO RESTORATION IN COUNTY RECORDS

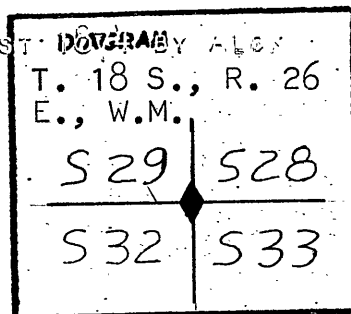

Description of corner evidence found:

FOUND A STONE 10" X 10" X 8" FOR SECTION CORNER FOR 28, 29, 32 & 33, MARKED WITH A FOUR SCRIBED ON ONE SIDE.




Description of monument and accessories established to perpetuate the original location of this corner

AS THE EVIDENCE FOUND AGREES WITH THE ORIGINAL NOTES I RESET THIS CORNER WITH A 2" X 36" GALVANIZED PIPE SET 30" IN THE GROUND WITH THE ORIGINAL STONE ADJACENT TO THE MONUMENT AND A 2 1/2" BRASS CAP MARKED:

NEW BEARING TREES:

- A DOUGLAS FIR, 10" IN DIAMETER, BEARS NORTH 21° WEST, 18.2 FEET; SCRIBED S 29 BT, T. 18 S., R. 26 E.
- A DOUGLAS FIR, 10" IN DIAMETER, BEARS NORTH 54° EAST, 46.6 FEET; SCRIBED S 28 BT, T. 18 S., R. 26 E.
- A WHITE FIR, 10" IN DIAMETER, BEARS SOUTH 42° EAST, 66.7 FEET; SCRIBED S 33 BT, T. 18 S., R. 26 E.
- A WHITE FIR, 15" IN DIAMETER, BEARS SOUTH 46° WEST, 27.9 FEET, SCRIBED S 32 BT, T. 18 S., R. 26 E.



I HEREBY CERTIFY THE ABOVE CORNER WAS RE-ESTABLISHED AS HEREIN DESCRIBED ON SEPT. 8, 1973.

WITNESSES: S/ *John C. Blunt*
S/ *Jack L. Smith*

Office of *County Surveyor* County of *Grant*
State of *Oregon*, I hereby certify that the within instrument was filed in this office for record on the *5th* day of *November*, 19 *73*, at *11:00* o'clock *A*.m., (signed)
Robert H. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)