


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: NO HISTORY TO THE LOCATION OF THIS CORNER.

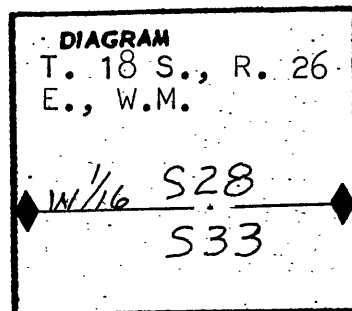


Description of corner evidence found: NONE

Description of monument and accessories I established to perpetuate the original location of this corner

SINCE THERE WAS NO EVIDENCE OF A CORNER SET I USED SINGLE PROPORTION TO SET THIS CORNER MIDWAY BETWEEN THE NORTH 1/4 CORNER AND NORTHWEST SECTION CORNER. I SET A 2" X 36" GALVANIZED IRON PIPE 30" IN THE GROUND, WITH A 2 1/2" BRASS CAP MARKED:

NEW BEARING TREES:

A DOUGLAS FIR, 12" IN DIAMETER, BEARS SOUTH 89° EAST, 30.8 FEET;
A DOUGLAS FIR, 16" IN DIAMETER, BEARS SOUTH 16° EAST, 31.8 FEET.



REGISTERED
PROFESSIONAL
LAND SURVEYOR

George J. Cook
OREGON
JULY 14, 1961
GEORGE J. COOK
640

I HEREBY CERTIFY THE ABOVE CORNER MONUMENT WAS RE-ESTABLISHED AS HEREIN DESCRIBED ON SEPT. 8, 1973.

WITNESSES:

s/ *John C. Blunt*
s/ *Jack L. Smith*

Office of County Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 5th day of November, 1973, at 11:01 o'clock A.m., (signed)
Robert D. Beatty by _____
(COUNTY OFFICIAL) (DEPUTY)