

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner set by Alonzo Gesner under contract no. 206, bearing date of July 14, 1874

Surveyor General's notes (records) state :

"Set stone 8 x 8 x 8 for 1/4 Sec. Cor."

No BT's set

No record of restoration.



Description of corner evidence found:

Found rock 8 x 8 x 8 marked 1/4 at junction of N-S fence and boundary fence to West.

Description of monument and accessories I established to perpetuate the original location of this corner



I set a standard F.S. corner consisting of a 3" disk on a 2" x 30" pipe with a 5" x 5" footplate (all aluminum) buried 20" in ground with original rock buried alongside. A mound of dirt & rock surrounds corner monument: from which

A P.P. 18" in dia. bears N. 80° E. a distance of 37.6 feet, scribed 1/4S32 BT.

A P.P. 12" in dia. bears S. 74°30' W. a distance of 47.2 feet, scribed 1/4S31 BT

Each BT is branded with band of red paint, a BT sign and brass tag marked PLS 350

In addition to conventional markings the corner monument is stamped as shown

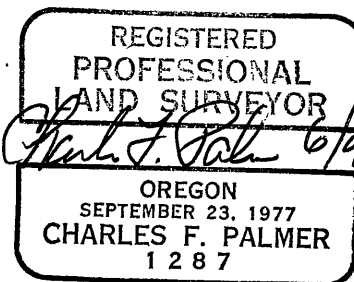

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 25 day of July, 1978, at 10 o'clock A.m., (signed)
Robert D. Dwyer by _____
 (COUNTY OFFICIAL) (DEPUTY)

Attest: John Livers
 County Clerk