


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: CORNER WAS ESTABLISHED IN AUGUST 1874 BY ALONZO GESNER UNDER GENERAL LAND OFFICE CONTRACT No. 206.

SURVEYOR GENERAL RECORDS STATES:

SET A 20" X 10" X 16" STONE FOR CORNER TO SECTIONS 4 & 5, T. 19 S., R. 26 E., AND SECTIONS 32 & 33, T. 18 S., R. 26 E., W.M.

NOTE: NO BEARING TREES
NO RESTORATION IN COUNTY RECORDS

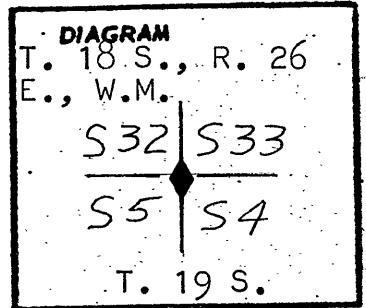


Description of corner evidence found: FOUND ROCK 20" X 10" X 16" FOR SECTION CORNER COMMON TO 32, 33, 4 & 5 WITH TWO GROVES ON THE WEST, AND FOUR GROVES ON EAST.

Description of monument and accessories I established to perpetuate the

original location of this corner AS THE EVIDENCE FOUND AGREES WITH THE ORIGINAL NOTES I RESET THIS CORNER WITH A 2" X 36" GALVANIZED PIPE SET 30" IN THE GROUND WITH THE ORIGINAL STONE ADJACENT TO THE MONUMENT AND A 2 1/2 BRASS CAP MARKED:

NEW BEARING TREES:

A PONDEROSA PINE, 9" IN DIAMETER, BEARS NORTH 21° WEST, 44.1 FEET; SCRIBED S 32 BT, T. 18 S., R. 26 E.
A WHITE FIR, 13" IN DIAMETER, BEARS NORTH 65° EAST, 76.6 FEET; SCRIBED S 33 BT, T. 18 S., R. 26 E.
A WHITE FIR, 13" IN DIAMETER, BEARS SOUTH 71° EAST, 63.3 FEET; SCRIBED S 4 BT, T. 19 S., R. 26 E.
A WHITE FIR, 8" IN DIAMETER, BEARS SOUTH 66° WEST, 61.8 FEET; SCRIBED S 5 BT, T. 19 S., R. 26 E.



I HEREBY CERTIFY THE ABOVE MONUMENT WAS RE-ESTABLISHED AS HEREIN DESCRIBED ON SEPT. 8, 1973.

WITNESSES:

S/ John C. Blunt
S/ Jack L. Smith

Office of County Surveyor County of Gent
State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 3rd day of November, 1973, at 11:29 o'clock A.m., (signed)
Robert H. Dwyer by _____
(COUNTY OFFICIAL) (DEPUTY)

REGISTERED
PROFESSIONAL
LAND SURVEYOR

George J. Cook
OREGON
JUL 4, 1961
GEORGE J. COOK
540