


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: CORNER WAS ESTABLISHED IN AUGUST 1874 BY ALONZO GESNER UNDER GENERAL LAND OFFICE CONTRACT No. 206.

SURVEYOR GENERAL RECORDS STATES:

SET STONE 16" X 14" X 8" FOR SOUTH 1/4 CORNER.

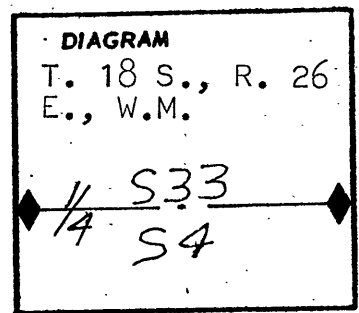

T. 19 S.


Description of corner evidence found: FOUND ORIGINAL STONE 16" X 14" X 8" IN A ROCK MOUND. BEARING TREE A PONDEROSA PINE BEARS SOUTH 70° EAST, 16.9 FEET.

Description of monument and accessories I established to perpetuate the original location of this corner

AS THE EVIDENCE FOUND AGREES WITH THE ORIGINAL NOTES
I RESET THIS CORNER WITH A 2 1/2" X 36" GALVANIZED IRON PIPE SET
30" IN THE GROUND WITH THE ORIGINAL STONE ADJACENT TO THE MONUMENT
AND A 2 1/2" BRASS CAP MARKED:

NEW BEARING TREES:

A WHITE FIR, 9" IN DIAMETER, BEARS
NORTH 30° EAST, 37.2 FEET;
A DOUGLAS FIR, 8" IN DIAMETER, BEARS
SOUTH 64° EAST, 41.3 FEET



REGISTERED
PROFESSIONAL
LAND SURVEYOR

George J. Cook
OREGON
JULY 14, 1961
GEORGE J. COOK
540

I HEREBY CERTIFY THE ABOVE CORNER
MONUMENT WAS RE-ESTABLISHED AS HEREIN
DESCRIBED ON SEPT. 8, 1973.

WITNESSES:

S/ *John C. Blunt*
S/ *Jack L. Smith*

Office of *County Surveyor* County of *Grant*
State of *Oregon*, I hereby certify that the within Instrument was filed in this office
for record on the *5*th day of *November*, 19*73*, at *11:28* o'clock *A*.m., (signed)
Robert H. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)