

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner originally established by Alonzo Gesner under GLO contract number 206, dated July 10, 1874. Surveyor General record states:

Set stone 22"x 20"x 8" for 1/4 sec cor.

DIAGRAM

T18S R27E J-19



No record of subsequent monumentation found in Grant County survey records.

Description of corner evidence found:

Found stone 22"x 17"x 8" partially buried marked 1/4.

See map of survey 1149, dated June, 1990.

Description of monument and accessories I established to perpetuate the

original location of this corner: In place of the stone I set a 1" x 30" galvanized iron pipe with brass cap marked as shown, 18 inches in the ground, from which:




New BTs, and, or BOs:

A 60" x 30" x 62" high boulder bears N40°E, 18.04 feet, marked X BO on the SW face.
A 5/8"x 30" rebar with plastic cap marked "BGA SURVEY MARKER" bears S30°E, 12.85 feet.
A 6'x 4'x 3' high boulder bears S28°W, 22.60 feet marked X BO on the NE face.
A 10 inch diameter Ponderosa Pine bears N 6°W, 42.51 feet marked 1/4 S 11 BT.

Raised a mound of stone, 3' diam to top cap.
Set a steel fencepost approximately 5 feet
North with land survey monument sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on May 1, 1990.

Witness:
Jeff Petersen
Greg Blackman

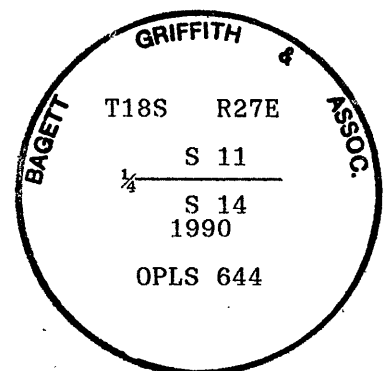

I used a steel tape and magnetic compass in the establishment of new accessories. I used 18° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
for record on the.....*17* day of.....*July*....., 19*90*
.....*Robert D. Baggett*..... by.....
(COUNTY OFFICIAL) (DEPUTY)