

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

DIAGRAM

Original GLO survey by Alonzo Gesner under
Contract No. 206 dated July 10, 1874. GLO
field notes state: "North, 40.00 ch.s
Set a 12"x10"x6" marked stone for 1/4 sec.cor."

T18S R27E
1/4
S17 S16


Description of corner evidence found:

I found a 14" x 12" x 4" stone in the center of a stone mound.


Description of monument and accessories I established to
perpetuate the original location of this corner:

On May 6, 1994 at the location of the marked stone I set a 5/8"
iron pin with a 1 1/2" Alum. cap stamped "PLS 1288 1994 MAPS",
with a steel fence post next to the corner.

Bearing Tree reference points established as shown below. Each
B.T. reference point was blazed with a B.T. sign attached. B.T.
signs scribed with corner location and "C. T. Palmer, PLS 1288".

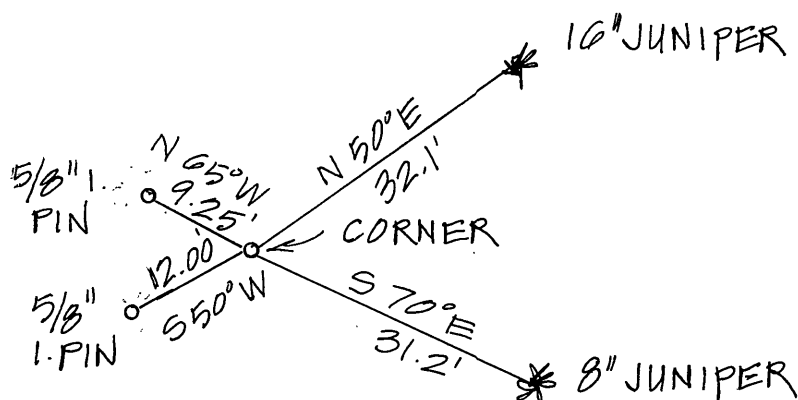

Witness: Toby Moss
Ref. Grant Co. Survey No. 1335

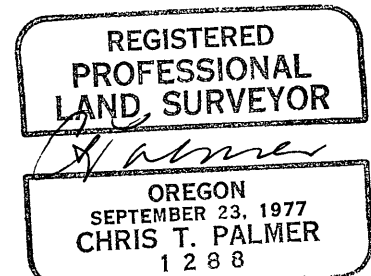

RENEWAL DATE
1-1-95

Office of County Surveyor, County of Grant, State of Oregon, I
hereby certify that the within instrument was filed in this
office for record on the 21 day of July, 1994.

Robert D. Dugan by _____
County Official Deputy