

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner established by : Henry W. Cooke, Deputy Surveyor
under Contract No. 494, dated January 16, 1884.

Surveyor General Record States: Set basalt stone 12x12x12 inches, 8 inches
in ground for 1/4 section corner marked 1/4 on west face from which:

A Pine 24 inches diam. bears S80°E, 202 lks dist. marked 1/4SBT

A Pine 6 inches diam. bears N48°W, 160 lks dist. marked 1/4SBT

T18S R28E

1/4

S4 | S3

1996

OPLS2734

Description of corner evidence found:

Found no evidence of the original corner stone. From the monumented corner position I found the
original BT's.

A 50" diam. P. Pine bears S82°E, 133.32 feet, blaze is grown over I did not open it.

A 8" diam. P. Pine bears N45°W, 105.60 feet, marked 1/4SBT.

See Record Map of Survey No. 1430

Description of monument and accessories set at corner location:

I intersected the record distances from the original bearing trees to position this corner. At the
corner position I set a 2 1/2" x 30" aluminum pipe with attached 2 1/2" aluminum cap, set 26
inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the
diagram.

From which I scribe new bearing trees:


A 11" diam. Juniper bears N50°E, 33.80 ft., marked 1/4S3 BT.

A 12" diam. Juniper bears S76°W, 12.29 ft., marked 1/4S4 BT.

I used a steel tape measuring to a 50d nail driven in the side center at root crown of the BT's and
magnetic compass, with 20° E. declination. I attached a washer stamped PLS2734 to face of the
BT's.

Witnesses: Dave Bondsteel

Date: September 24, 1996

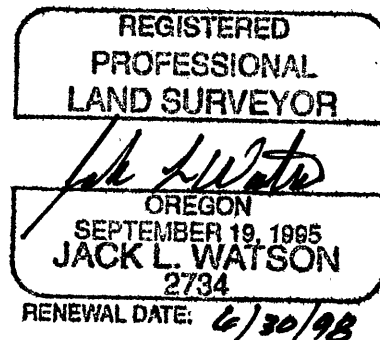

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 1 day of NOV, 1996
Robert O. Gage by L
(COUNTY OFFICIAL) (DEPUTY)