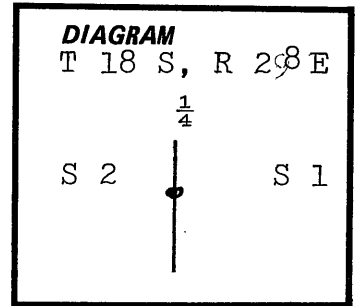


CERTIFIED RECORD OF LAND CORNER MONUMENTATION**History of original corner establishment:**

The original GLO survey was done by Henry W. Cooke under contract no. 494, dated January 16, 1884.

The original field notes state:

S 00804' W, 42.33 chs. set a 16"x 10"x 7" stone marked "1/4" for 1/4 corner, from which a 40" pine bears S 58°E, 209.2 feet.



**Description of corner evidence found:**

Found a 50" p pine with visible scribbling, bears S 58°E, 209.2 feet from the corner. The corner was not found.

Description of monument and accessories I established to perpetuate the**original location of this corner:**

On 11/15/86 at the bearing and distance of record from the BT, we set an all alum. monument, 2 1/2" dia. x 30" long, with a 3" cap stamped "1/4, S 1, S 2, T 18 S, R 28 E, WM, PLS 1288, 1986", buried 24", 6" above the ground. Set steel fence posts 3' east and north with land survey and boundary signs attached.

A 5/8" iron pin with a 1 1/2" alum. cap bears S 31°48'W, 11.40 feet, scribed "RM, PLS 1288, MAPS, 1986". The 50" BT has a 6" band of red paint, BT and LS signs and a brass washer stamped "PLS 1288" set at the base.

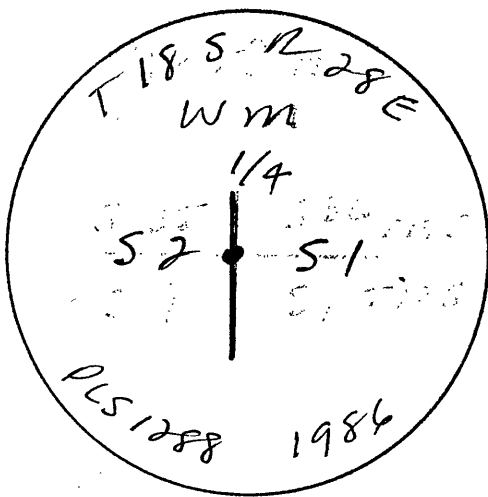

GRANT COUNTY
SURVEY # 968

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 6 day of Apr, 1987
Robert D. Bayard by _____
(COUNTY OFFICIAL) (DEPUTY)