

CERTIFIED RECORD OF LAND CORNER MONUMENTATION**History of original corner establishment:**

The original GLO survey was done by Henry W. Cooke under contract no. 494, dated January 16, 1884.

DIAGRAM

T 18 S, R 28 E

C 1/4

S 1

Description of corner evidence found:

This corner was not set under the original GLO survey. Nothing found.



Description of monument and accessories | established to perpetuate the original location of this corner:

On 11/14/86 at the proportioned location, we set an all alum. monument, 2 1/2" dia. x 30" long, with a 3" dia. cap stamped "C 1/4, S 1, T 18 S, R 28 E, WM, PLS 1288, 1986", buried 24", 6" above the ground. Set a steel fence post 1' west with a land survey sign attached.

A 10" p pine bears S 11°00'E, 34.2 feet, scribed "C 1/4, S 1, BT"

A 10" p pine bears S 35°30'W, 38.4 feet, scribed "C 1/4, S 1, BT"

Both BT's have a 6" band of red paint, BT and LS signs and a brass washer stamped "PLS 1288" set at the base.

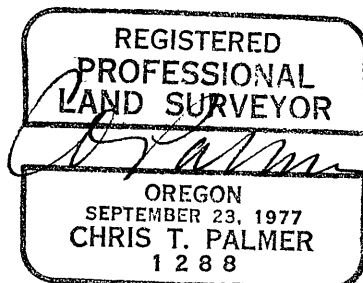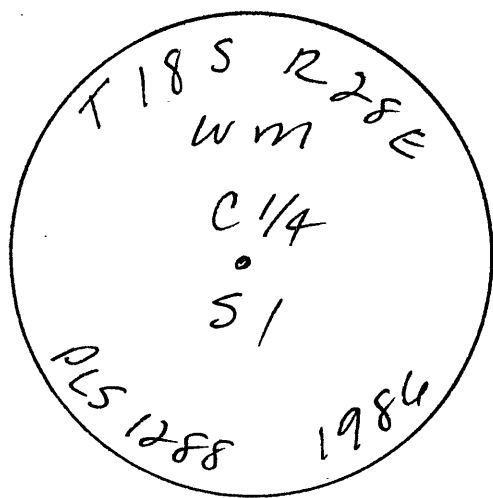

GRANT COUNTY
SURVEY # 968

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 6 day of APR, 1987
Robert D. Dwyer by _____
(COUNTY OFFICIAL) (DEPUTY)