


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The original GLO survey was done by Bamford Robb under contract no. 366, dated August 18. 1880.

The original field notes state:

North, 40.0 chs. set a 14"x 12"x 8" stone in a stone mound for $\frac{1}{4}$ corner.

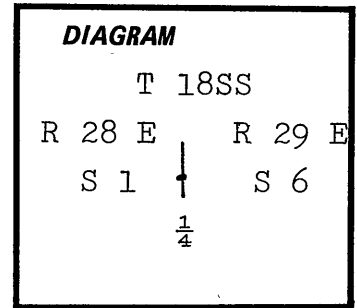

Description of corner evidence found:

Found a 10"x 7"x 6" stone marked " $\frac{1}{4}$ " in a stone mound.



Description of monument and accessories I established to perpetuate the original location of this corner:

On 11/14/86 at the location of the marked stone we set an all alum. monument, 2 $\frac{1}{2}$ " dia. x 30" long, with a 3" dia. cap stamped "S 1, S 6, T 18 S, T 28 E, T 29 E, WM, PLS 1288, 1986", buried 20", 10" above the ground in a stone mound. Set a steel fence post 1' north with a land survey sign attached.

A 6" w juniper bears N 10°15'W, 132.4 feet, scribed " $\frac{1}{4}$, S 1, BT"

A 10" w juniper bears S 35°20'E, 113.7 feet, scribed " $\frac{1}{4}$, S 6, BT"

Both BT's have a 6" band of red paint, BT and LS signs and a brass washer stamped "PLS 1288" set at the base.

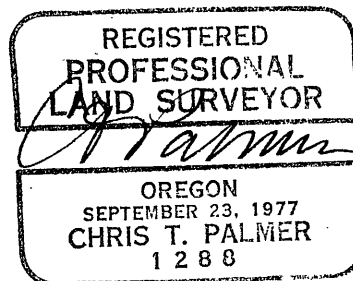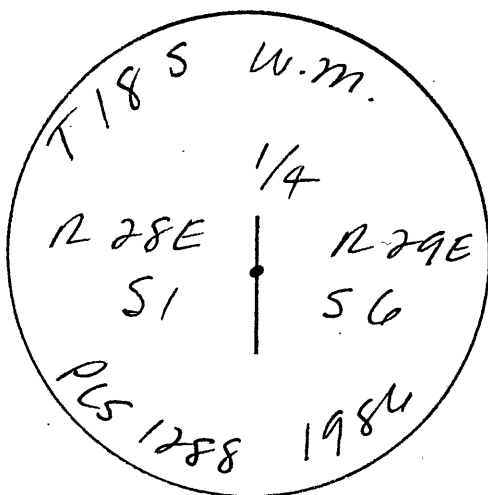

Office of SURVEYOR County of GRANT
 State of OREGON, I hereby certify that the within instrument was filed in this office
 for record on the 6 day of Apr, 1987
Robert D. Dwyer by _____
 (COUNTY OFFICIAL) (DEPUTY)

*GRANT COUNTY
SURVEY # 968*