


D-22

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

T 18 S, R 28 E, WM

History of original corner establishment:

The original GLO survey was done by Henry W. Cooke under contract no. 494, dated January 16, 1884.





Description of corner evidence found:

This corner was not set during the GLO survey. Nothing found.

Description of monument and accessories | established to perpetuate the original location of this corner:

On 11/15/86, at the proportioned location, we set an all alum. mon., 2 1/2" dia. x 30" long, with a 3 1/4" cap stamped, " SW 1/16, S 1, T 18 S, R 28 E, 1986, PLS 1288", buried 18", 12" above the ground in a stone mound. Set steel fence posts 3' north and west with land survey and boundary signs attached.

A 8" juniper bears S 28°30'W, 7.8 feet, scribed "SW 1/16, S 1, BT"
A 8" juniper bears N 66°36'W, 39.9 feet, scribed "SW 1/16, S 1. BT"
Both BT's have a 6" band of red paint, BT and LS signs and a brass washer stamped "PLS 1288" set at the base.

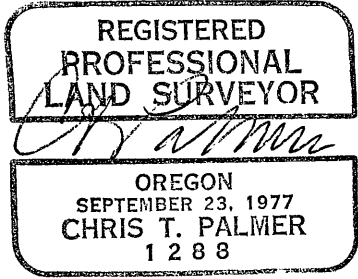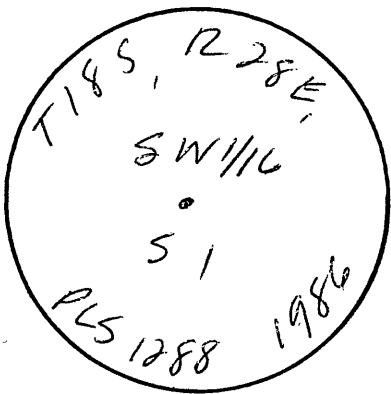

GRANT COUNTY
SURVEY # 968

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 6 day of apr, 1987
Robert D. Bajer by _____
(COUNTY OFFICIAL) (DEPUTY)