

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner established by : Henry W. Cooke, Deputy Surveyor
under Contract No. 494, dated January 16, 1884.

Surveyor General Record States: Set basalt stone 16x14x7 inches, 11 inches
in ground for 1/4 section corner marked 1/4 on N. face and raised a mound
of stone alongside.

T18S R28E
S5
1/4 —
S8
1996
OPLS2734

Description of corner evidence found:

Found a stone 13"x10"x6" set in the ground, with a small mound of stone alongside, marked 1/4
on N. face.

See Record Map of Survey No. 1430

Description of monument and accessories set at corner location:


I accept the marked corner stone. At the corner position I set a 2 1/2" x 30" aluminum pipe with
attached 2 1/2" aluminum cap, set 12 inches in the ground, surrounded by a mound of stone. I
placed the original corner stone north and alongside the aluminum pipe. The cap is stamped as
shown in the diagram.

From which I scribe new bearing trees:

- A 14" diam. Juniper bears N64°E, 88.88 ft., marked 1/4S5 BT.
- A 17" diam. Juniper bears S31°E, 55.72 ft., marked 1/4S8 BT.
- A 17" diam. Juniper bears N80°W, 96.05 ft., marked 1/4S5 BT.
- A 15" diam. Juniper bears N59°W, 90.07 ft., marked 1/4S5 BT.

I used a steel tape measuring to a 50d nail driven in the side center at root crown of the BT's and
magnetic compass, with 20° E. declination to tie BT's.

Date: October 17, 1996

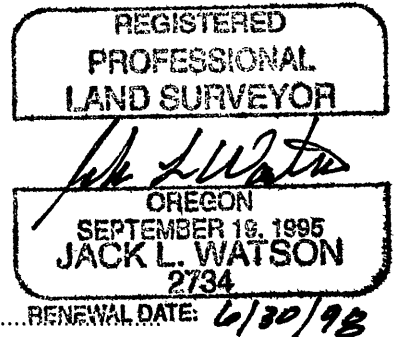

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 1 day of NOV, 1996
Robert D. Ray by 6
(COUNTY OFFICIAL) (DEPUTY)