

CERTIFIED RECORD OF LAND CORNER MONUMENTATION**History of original corner establishment:**

The original GLO survey was done by Henry W. Cooke under contract no. 494, dated January 16, 1986.

The original field notes state:

North, 80.0 chs, set a 14"x 14"x 7" stone 10" in ground for corner to Sections 1,2,11, and 12.


From which bears:

A 48" pine, N 62°E, 61.38 feet, scribed "S 1, T 18 S, R 28 E, BT"

A 12" pine, S 68°W, 61.38 feet, scribed "S 11, T 18 S, R 28 E, BT"

A 48" pine, S 60°E, 42.90 feet, scribed "S 12, T 18 S, R 28 E, BT"

A 15" pine, N 52°W, 72.60 feet, scribed "S 1, T 28 S, R 28 E, BT"

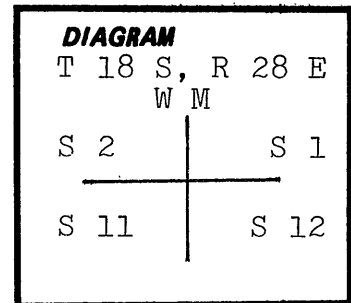**Description of corner evidence found:**

Found a 17"x 13"x 5" stone with 5 marks on north and 1 mark on the west faces, from which:

A 50" p pine bears N 57°55'E, 60.2 feet, with visible scribing

A 19" p pine bears S 52°17'W, 63.6 feet, with visible scribing

A 36" p pine blowdown in the SE quad., visible scribing

A p pine stump in the NW quad., no scribing visible



Description of monument and accessories established to perpetuate the**original location of this corner:**

On 8/27/86, at the location of the marked stone, we set an all alum. monument, 2 1/4" dia. x 30" long, with a 3" dia. cap stamped "S 1, S 2, S 11, S 12, T 18 S, R 28 E, PLS 1288, 1986", buried 24", 6" above the ground in a stone mound. Set a steel fence post 2' north with land survey and boundary signs.

A 6" p pine bears N 55°12'W, 52.8 feet, scribed "S 2, T 18 S, R 28 E, BT"

A 10" p pine bears S 25°00'E, 29.0 feet, scribed "S 12, T 18 S, R 28 E, BT"

All BT's have a 6" band of red paint, BT and LS signs and a brass washer stamped "PLS 1288" set at the base.

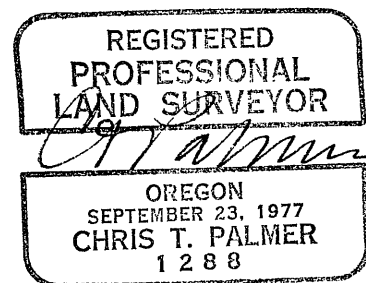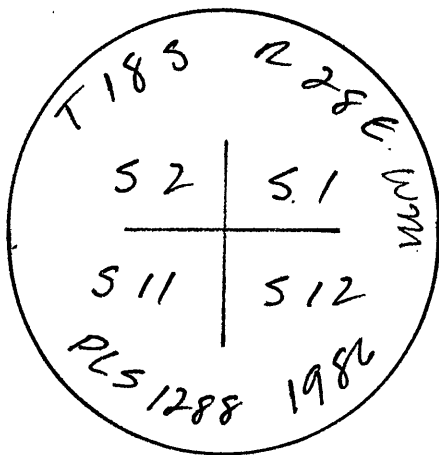

Office of SURVEYOR County of GRANT
 State of OREGON, I hereby certify that the within instrument was filed in this office
 for record on the 6 day of Apr, 1987
Robert D. Bazar by _____
 (COUNTY OFFICIAL) (DEPUTY)

GRANT COUNTY
SURVEY # 968