


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The original GLO survey was done by Henry W. Cooke under contract no. 494, dated January 16, 1884.



Description of corner evidence found:

This corner was not set under the original GLO survey. Nothing found.



Description of monument and accessories established to perpetuate the original location of this corner:

On 11/11/86 at the proportioned location, we set an all alum. monument, 2½" dia. x 30" long, with a 3" dia. cap stamped, N 1/16, S 11, S122, T 18 S, R 28 E, WM, PLS 1288, 1986", buried 18", 12" above the ground in a stone mound. Set a steel fence post 3' north with land survey and boundary signs attached.

A 10" p pine bears S 11°04'E, 25.4 feet, scribed, "N 1/16, S 12, BT"

A 6" p pine bears S 86°05'W, 16.5 feet, scribed, "N 1/16, S 11, BT"

Both BT's have a 6" band of red paint, BT and LS signs and a brass washer stamped "PLS 1288" set at the base.

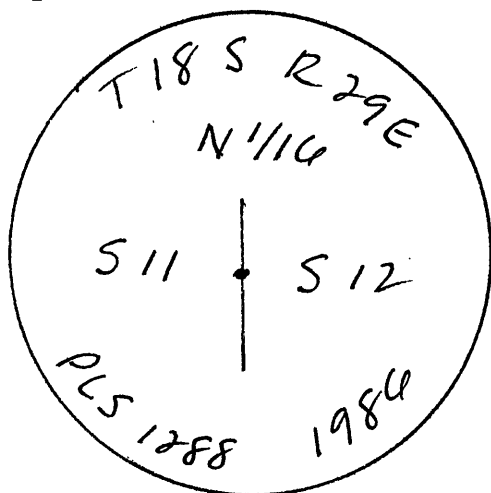

Office of SURVEYOR County of GRANT
 State of OREGON, I hereby certify that the within instrument was filed in this office
 for record on the 6 day of Sept, 1987
Robert D. Baggett by _____
 (COUNTY OFFICIAL) (DEPUTY)

GRANT COUNTY
 SURVEY # 968