

CERTIFIED RECORD OF LAND CORNER MONUMENTATION**History of original corner establishment:**

The original GLO survey was done by Henry W. Cooke under contract no. 366, dated January 16, 1884.

DIAGRAM

T 18 S, R 28 E
W M
C 1/4
S 12

Description of corner evidence found:



This corner was not set under the original GLO survey. Nothing found.

Description of monument and accessories | established to perpetuate the original location of this corner:

On 11/11/86 at the proportioned location, we set an all alum. monument, 2 1/2" dia. x 30" long, with a 3" dia. cap stamped, "C 1/4, S 12, T 18 S, R 28 E, WM, PLS 1288, 1986", buried 24", 6" above the ground. Set a steel fence post 3' west with land survey and boundary signs attached.

A 10" w juniper bears N 6°00'W, 21.8 feet, scribed "C 1/4, S 12, BT"
A 8" p pine bears S 83°10'W, 107.4 feet, scribed "C 1/4, S 12, BT"

Both BT's have a 6" band of red paint, BT and LS signs and a brass washer stamped "PLS 1288" set at the base.

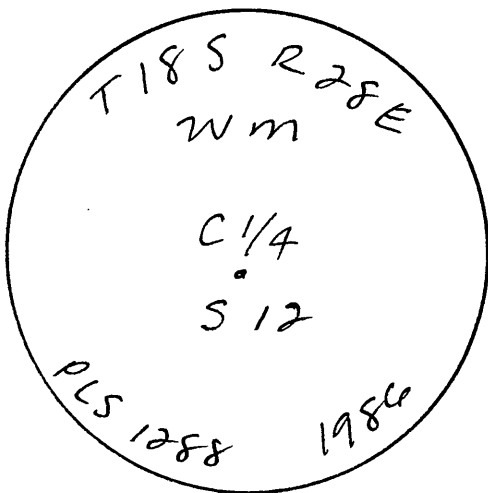

GRANT COUNTY
SURVEY # 968

Office of SURVEYOR County of GRANT
State of OREGON I hereby certify that the within instrument was filed in this office
for record on the 6 day of Sept, 1987
Robert D. Smith by _____
(COUNTY OFFICIAL) (DEPUTY)