

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner established by : Henry W. Cooke, Deputy Surveyor
under Contract No. 494, dated January 16, 1884.

Surveyor General Record States: Set basalt stone 24x14x10 inches, 18 inches in ground for corner to sections 7,8,17,18 marked with 4 notches on S. and 5 notches on E. edges. From Which

A Pine 40 inches diam. bears N60°E 28 lks dist. marked T18SR28ES8BT
A Pine 18 inches diam. bears S72°E 40 lks dist. marked T18SR28ES17BT
A Pine 10 inches diam. bears S22°W 55 lks dist. marked T18SR28ES18BT
A Pine 15 inches diam. bears N32°W 110 lks dist. marked T18SR28ES7BT

T18S	R28E
S7	S8
+	
S18	S17
1996	
OPLS2734	

Description of corner evidence found:

From the monumented corner position:


A 38" diam. pine blowdown, the roothole bears N84°E, 45.6 ft., with a blaze which was not scribed.

A 23" diam. P. Pine bears S41°E, 86.2 ft. with a blaze which was not scribed.

A 16" diam. P. Pine log and stump remains, bear S22°W, 36.3 ft., marked T18SR28E in partially healed blaze.

A 18" diam. P. Pine log, no evidence of it's orig. location, bears N22°W, 19.2 ft., with a blaze which was not scribed.

No Evidence of the original corner stone was found, this area has been logged. No position for this corner could be determined that would agree with the three BT positions which I could positively locate. The NE, SE and NW BT's were not scribed originally for some unknown reason. After consulting the BLM it was agreed that the scribed BT is the best evidence of the original corner position.

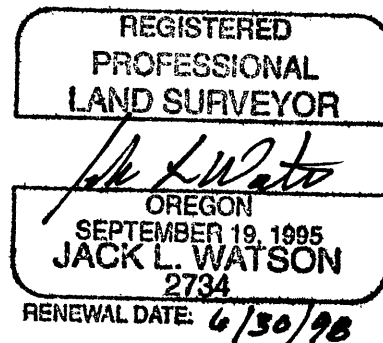

See Record Map of Survey No. 1430

Description of monument and accessories set at corner location:

I accept the scribed, SW, BT and position this corner at record bearing and distance from it. At the corner position I set a 2 1/2" x 30" aluminum pipe with attached 2 1/2" aluminum cap, set 24 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which I scribe new bearing trees:

A 10" diam. Fir bears N54°E, 19.49 ft., marked T18SR28ES8BT.

A 6" diam. P. Pine bears S65°E, 34.85 ft., marked X BT.

A 10" diam. Fir bears S67°W, 30.33 ft., marked T18SR28ES18BT.

A 9" diam. Fir bears N35°W, 37.55 ft., marked T18SR28ES7BT.

I used a steel tape measuring to a 50d nail driven in the side center at root crown of the BT's and magnetic compass, with 20° E. declination. I attached a washer stamped PLS2734 to face of the BT's.

Witnesses: Dave Bondsteel

Date: September 24, 1996

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 1 day of NOV, 1996
Robert D. Baxst by _____
(COUNTY OFFICIAL) (DEPUTY)