

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner established by : Henry W. Cooke, Deputy Surveyor
under Contract No. 494, dated January 16, 1884.

Surveyor General Record States: Set basalt stone 16x12x10 inches, 11
inches in ground for corner to sections 8,9,16,17 marked with 4 notches on
S. and E. edges. Dug pits 18x18x12 inches in each section 5.5 ft dist. and
raised a mound of earth alongside 2 ft. high 4.5 ft. base.

T18S R28E	
S8	S9
+	
S17	S16
1996	
OPLS2734	

Description of corner evidence found:

Found a basalt stone 16"x12"x10" with a small mound of stone alongside, no visible marks could
be found on the corner stone. There are no other stones of call size in this area.

See Record Map of Survey No. 1430

Description of monument and accessories set at corner location:

I accept this stone for the corner. At the corner position I set a 2 1/2" x 30" aluminum pipe with
attached 2 1/2" aluminum cap, set 26 inches in the ground, surrounded by a mound of stone. I
placed the original stone north and alongside the pipe. The cap is stamped as shown in the
diagram.

From which I set these references:

A 5/8"x30" iron pin, bears N45°E, 30.00 feet, with attached red plastic cap marked
CORNERSTONE SURVEYING, INC.

A 5/8"x30" iron pin, bears S45°E, 30.00 feet, with attached red plastic cap marked
CORNERSTONE SURVEYING, INC.


A 5/8"x30" iron pin, bears S45°W, 30.00 feet, with attached red plastic cap marked
CORNERSTONE SURVEYING, INC.

A 5/8"x30" iron pin, bears N45°W, 30.00 feet, with attached red plastic cap marked
CORNERSTONE SURVEYING, INC.

I used a steel tape and magnetic compass, with 20° E. declination, to tie references.

Witnesses: Dave Bondsteel

Date: September 24, 1996

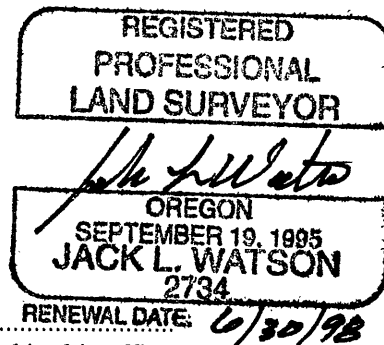

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 1 day of NOV, 1996
Robert A. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)