

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner established by : Henry W. Cooke, Deputy Surveyor
under Contract No. 494, dated January 16, 1884.

Surveyor General Record States: Set basalt stone 16x12x12 inches, 11
inches in ground for 1/4 section corner marked 1/4 on west face and raised a
mound of stone alongside.

T18S R28E

1/4


S16 | S15

1996

OPLS2734

Description of corner evidence found:

Found a stone 13"x10"x11" set in the ground. The bottom of the stone broke off when it was
removed from the ground. The stone is marked 1/4 on the west face. A north-south fence line is
31 feet west.

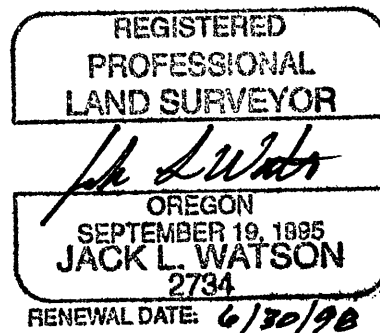

See Record Map of Survey No. 1430

Description of monument and accessories set at corner location:

I accept the marked stone for the 1/4 corner. At the corner position I set a 2 1/2" x 30" aluminum
pipe with attached 2 1/2" aluminum cap, set 8 inches in the ground, surrounded by a mound of
stone. I placed the original stone west and alongside the pipe. The cap is stamped as shown in the
diagram.

From which I set a new reference:

A 5/8"x15" iron pin, bears N47°E, 23.15 feet, with attached red plastic cap marked
CORNERSTONE SURVEYING, INC.

A 5/8"x15" iron pin, bears S36°E, 19.39 feet, with attached red plastic cap marked
CORNERSTONE SURVEYING, INC.

A 5/8"x15" iron pin, bears S56°W, 36.14 feet, with attached red plastic cap marked
CORNERSTONE SURVEYING, INC.

A 5/8"x15" iron pin, bears N51°W, 37.35 feet, with attached red plastic cap marked
CORNERSTONE SURVEYING, INC.

I used a steel tape and magnetic compass, with 20° E. declination, to tie the references.

Date: October 7, 1996

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 1 day of Nov, 1996
Robert D. Bayart by _____
(COUNTY OFFICIAL) (DEPUTY)