


CORNER RESTORATION

CORNER W ¼ corner
Sec. 14 TWP 18S RANGE 28E

ORIGINAL SURVEY BY: Henry W. Cooke

CONTRACT NUMBER: 494

CONTRACT DATE: January 16, 1884

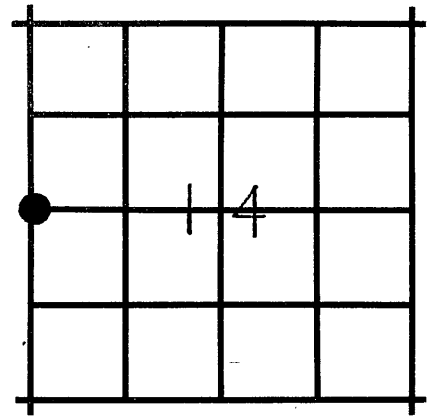

ORIGINAL DESCRIPTION:

North between Sections 14 and 15

40.00 set a basalt stone 14x10x8 10 inches in ground for ¼ section corner marked ¼ on West face.

RESTORATION BY, STAMP AND DATE:

R. D. Bagett
G. L. Earl

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

March 3, 1981

Grant County Surveyor

EVIDENCE FOUND:

Found a basalt stone 11"x7"x5" firmly set in ground with only 2 inches of the top exposed, and marked ¼ on the West face.

RECEIVED AND
FILED

MAR 30 1981

OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
Attest: *James Lawrence*

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: Set 1½"x30" galvanized iron pipe 20 inches in the ground with brass cap marked as shown.

No bearing trees available.

Buried the original corner stone East and alongside iron pipe and raised a mound of stone with a 3 foot base to top of pipe.

Corner is 1½ ft. North of a fenceline which runs East and West, and is 148 ft. West of an overhead powerline which is on a small ridge top.

See Map of Survey No. 667.

MONUMENT MARKED

