


# **CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

## **History of original corner establishment:**

The original GLO survey was done by Bamford Robbke under contract no. 366, dated august 18, 1880.

The original field notes state:

North, 40.0 chs, set a 12"x 8" x 8" stone in a stone mound for  $\frac{1}{4}$  corner.



## **Description of corner evidence found:**

Found a 9"x 9" x 7" stone marked " $\frac{1}{4}$ " on a face in a stone mound.

## **Description of monument and accessories | established to perpetuate the**



### **original location of this corner:**

On 8/21/86 at the location of the stone mound, we set an all alum. monument,  $2\frac{1}{4}$ " dia. x 30" long, with a 3" dia. cap stamped " $\frac{1}{4}$ , S 13, S 18, T 18 S, R 28 E, R 29 E, PLS 1288, 1986", buried 22", 8" above the ground in a stone mound. Set a steel fence post 2' east of the corner with a land survey sign.

A 10" w juniper bears N  $70^{\circ}45'$  E, 100.1 feet, scribed " $\frac{1}{4}$ , S 18, BT"

A 4" w juniper bears N  $24^{\circ}47'$  W, 57.3 feet, scribed " $\frac{1}{4}$ , S 13, BT"

Both BT's have a 6" band of red paint, BT and LS signs and a brass washer stamped "PLS 1288" set at the base.

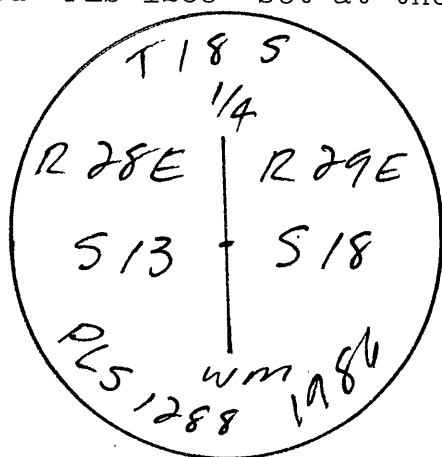

**GRANT COUNTY  
SURVEY # 968**

Office of SURVEYOR County of GRANT  
 State of OREGON, I hereby certify that the within instrument was filed in this office  
 for record on the 6 day of APR, 1987  
Chris T. Palmer by \_\_\_\_\_  
 (COUNTY OFFICIAL) (DEPUTY)