


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner not previously established.

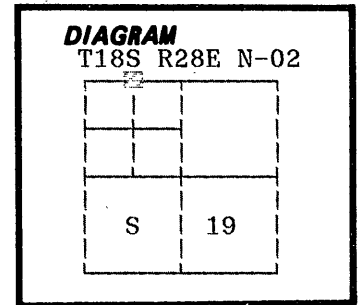

No record of subsequent monumentation found in Grant County survey records.

Description of corner evidence found:
Corner not previously established.
See map of survey 1149 dated June, 1990.

Description of monument and accessories I established to perpetuate the original location of this corner: At position determined by survey, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 18 inches in the ground, from which:
New BTs:
A 11 inch diameter Ponderosa Pine bears N89°E, 4.60 feet marked W 1/16 S 18 BT.
A 6 inch diameter Ponderosa Pine bears S31°W, 7.00 feet marked X BT.


Raised a mound of stone around monument, 4 ft. base to top of cap.

I hereby certify that the above corner point was perpetuated as hereon described on May 31, 1990.

Witnesses:
Monty Gibson
Curt Silva

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 10, 1984
DUANE I. GRIFFITH
644

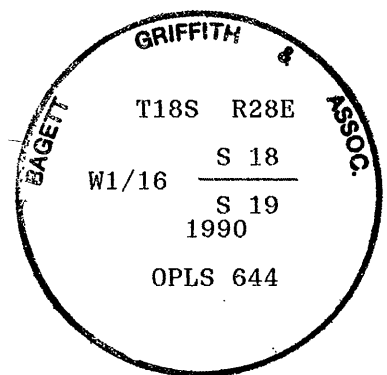

I used a steel tape and magnetic compass in the establishment of new accessories. I used 18° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
for record on the.....*17* day of.....*July*....., 19*90*.....
.....*Robert D. Baggett*..... by.....
(COUNTY OFFICIAL) (DEPUTY)