


CORNER RESTORATION

N 1/4 COR
CORNER Sec.19 TWP 18 S. RANGE 28 E.

ORIGINAL SURVEY BY: Henry W. Cooke

CONTRACT NUMBER: 494

CONTRACT DATE: January 16, 1884

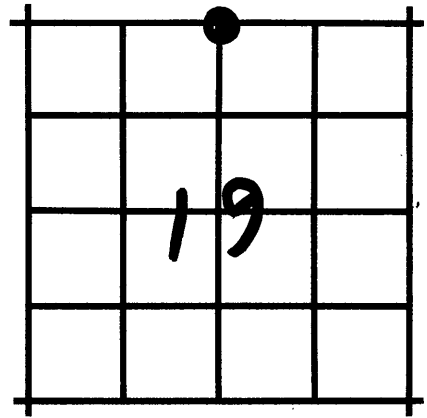

ORIGINAL DESCRIPTION: Set stone 18"x12"x6", 12 ins in ground for 1/4 section corner, marked 1/4 on n face from which,
A pine, 36 ins dia bears S 65° W 60 lks dist marked 1/4 S BT
A pine, 12 ins dia bears N 18° E 21 lks dist marked 1/4 S BT

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
D.I. Griffith

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

April 24, 1990

Grant County Surveyor

EVIDENCE FOUND: Found a stone 19"x11"x7" firmly set in a mound of stones, marked 1/4 on the N face.
Found a 20" P Pine N 18° E, 21 lks. dead and down scribes visible.
Found a 36+- P Pine S 65° E, 60" lks, a burned out stump, no marks visible.

RECEIVED AND
FILED

JUL 17 1990

OFFICE OF COUNTY SURVEYOR
Attest: *John L. Watson*

See Survey No. 1149, dated June, 1990.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

In place of stone: I set a 1½"x30" galv. iron pipe, 26" in the ground, with attached brass cap marked as shown.

From which;

A 5/8" x 30" rebar with aluminum cap marked "GRANT COUNTY SURVEYOR RP 1" bears N22°E, 5.60 feet.


A 5/8" x 30" rebar with aluminum cap marked "GRANT COUNTY SURVEYOR RP 2" bears N30°E, 7.91 feet.

A P.Pine 8" diam., bears N33°W, 33.42 ft. marked X BT

A 5/8" x 30" rebar with aluminum cap marked "GRANT COUNTY SURVEYOR RM 4" bears N65°E, 6.80 feet.

I buried the marked stone W. and alongside the iron pipe and raised a mound of stone to top of cap.

MONUMENT MARKED

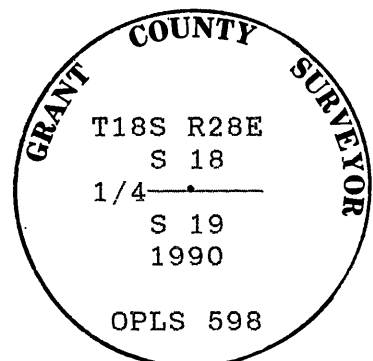

I used mag. compass with 18°E var. and a steel tape, in the establishment of new accessories. The distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.