


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: Henry W. Cooke, Deputy Surveyor,
under Contract No. 494, dated Jan. 16, 1884.

Surveyor General Record States: Set a basalt stone 14x12x10 inches, 10
inches in ground for corner to Sections 21,22,27 & 28 marked with 2
notches on south and 3 notches on east edges, raised a mound of stone
2½ high 4½ foot base.

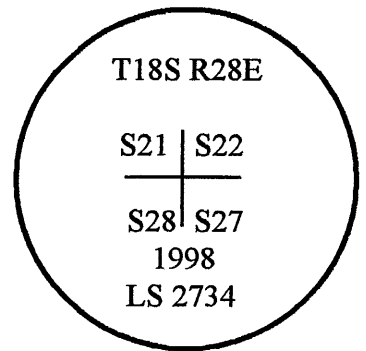

Description of corner evidence found:

Found a mound of 20 stones, no evidence of the cornerstone was found.

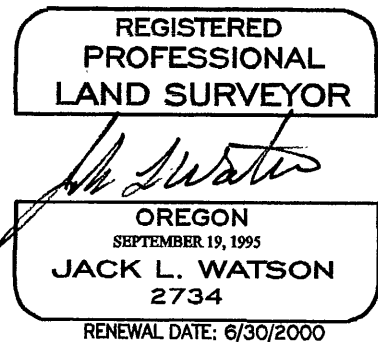

Description of monument and accessories set at corner location:

I accept the position of the mound stone. At the corner position I set a 2½"x30" aluminum pipe
with attached 3" aluminum cap, 12 inches in the ground, surrounded by a mound of stone. The
cap is stamped as shown in the diagram.

From which I scribe new bearings tree:

A 9" Juniper bears N74°E, 39.26 feet, marked T18SR28ES22BT.

A 14" Juniper bears N2°W, 72.20 feet, marked T18SR28ES21BT.

From which I set new reference monuments:

A 5/8"x30" iron pin bears S56°E, 12.04 feet, with attached red plastic cap
marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears S62°W, 12.37 feet, with attached red plastic cap
marked CORNERSTONE SURVEYING INC.

I used a magnetic compass, with 20° east variation, to center of BT's and references and a steel
tape measuring to a 50d nail driven in the side center at the root crown of the BT's.

Date: July 10, 1998

Witnesses: Cris Steinmetz

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 15 day of JULY, 1998.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)