


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The original GLO survey was done by Henry W. Cooke under contract no. 494, dated January 16, 1884.

The original field notes state:

North, 80.0 chs, set a 16"x 14"x 14" stone for corner to Sections 22,23,27 and 26. raised a mound of stone alongside.

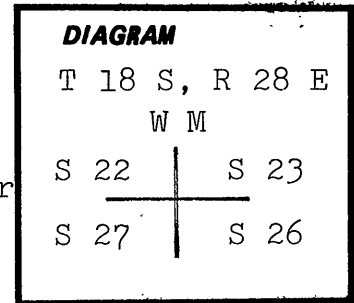

Description of corner evidence found:




Found 16"x 12"x 10" stone with 2 notches on south and east edges and a stone mound alongside.

Description of monument and accessories | established to perpetuate the original location of this corner:

On, 8/13/86 at the location of the marked stone, we set an all alum. monument, 2 1/4" dia. x 30" long, with a cap stamped "S 22, S 23, S 26 S 27, T 18 S, R 28 E PLS 1288, 1986", buried 15", 15" above the ground. Set a steel fence post with a land survey sign 3' east of the corner.

A 14" p pine bears S 17°12'W, 144.0 feet, scribed "S 27, T 18 S, R 28 E, BT"
A 4" p pine bears S 14°15'E, 27.5 feet, scribed "X"
A 10" w juniper bears N 80°23'E, 210.0 feet, scribed S 23, T 18 S, R 28 E, BT"
A 8" w juniper bears N 28°09'W, 85.7 feet, scribed S 22, T 18 S, R 28 E, BT"

All BT's have a 6" band of red paint, BT and LS and a brass washer stamped "PLS 1288" set at the base.

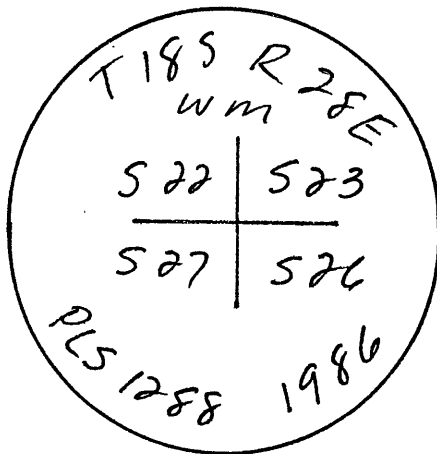

**GRANT COUNTY
SURVEY # 968**

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 6 day of SEP, 1987
Robert D. English by Chris T. Palmer
(COUNTY OFFICIAL) (DEPUTY)