

CERTIFIED RECORD OF LAND CORNER MONUMENTATION**History of original corner establishment:**

The original GLO survey was done by Henry W. Cooke under contract no. 494, dated January 16, 1884.

The original field notes state:

S $88^{\circ}41'W$, 40.09 chs, set a 16"x 14"x 5" stone for $\frac{1}{4}$ corner. From which bears:

A 28" pine, N $38^{\circ}E$, 154.44 feet, scribed " $\frac{1}{4}$ S, BT"

A 30" pine, S $65^{\circ}W$, 141.9 feet, scribed " $\frac{1}{4}$ S, BT"

DIAGRAM

T 18 S, R 28 E
WM
S 23
— $\frac{1}{4}$ —
S 26

Description of corner evidence found:

Found a 14"x 12"x 8" stone marked " $\frac{1}{4}$ " on the north face and a 30" p pine windfall in the SW quad.



Description of monument and accessories | established to perpetuate the original location of this corner:

On 8/13/86, at the location of the marked stone, we set an all alum. monument, $2\frac{1}{2}$ " dia. x 30" long, with a 3" cap stamped " $\frac{1}{4}$, S 23, S 26, T 18 S, R 28 E, PLS 1288, 1986", buried 22", 8" above the ground in a stone mound. Set a steel fence post with a land survey sign 3' west of the corner.

A 8" w juniper bears S $67^{\circ}07'E$, 190.5 feet, scribed " $\frac{1}{4}$, S226, BT"

A 6" w juniper bears N $78^{\circ}30'E$, 17.7 feet, scribed " $\frac{1}{4}$, S 23, BT"

Both BT's have a 6" band of red paint, BT and LS signs and a brass washer stamped "PLS 1288" set at the base.

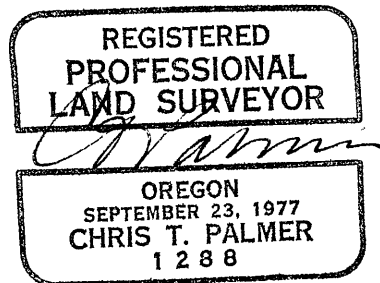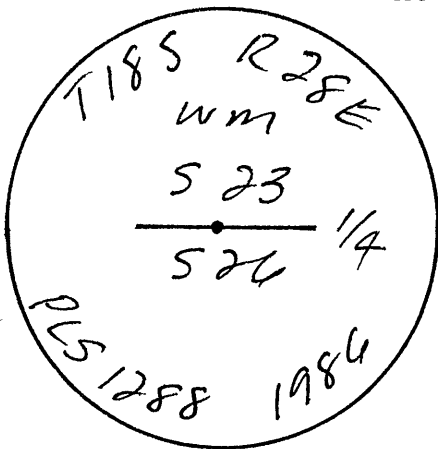

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 6 day of Apr, 1987
Robert D. Baggett
(COUNTY OFFICIAL) (DEPUTY)

GRANT COUNTY
SURVEY # 968