

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

The original GLO survey was done by Henry W. Cooke under contract no. 494, dated January 16, 1884.

The original field notes state:

S 88°06'W, 40.10 chs, set a 14"x 14"x 6" stone, marked " $\frac{1}{4}$ " on the north face for $\frac{1}{4}$ corner, From which bears:

A 10" pine, S 01°E, 68.64 feet, scribed " $\frac{1}{4}$ S, BT"



Description of corner evidence found:

Found a 14"x 14"x 6" stone marked " $\frac{1}{4}$ " on north face.

A 27" p pine bears S 00°39'E, 68.5 feet, visible scribing



Description of monument and accessories | established to perpetuate the

original location of this corner:

On 8/12/86, at the location of the marked stone, we set an all alum. monument, 2 $\frac{1}{4}$ " dia. x 30" long, with a 3" cap stamped " $\frac{1}{4}$, S 24, S 25, T 18 S, R 28 E, PLS 1288, 1986", buried 24", 6" above the ground. Set a steel fence post with a land survey sign 2' east of the corner.

A 10" p pine bears N 86°16'E, 8.1 feet, scribed " $\frac{1}{4}$, S 24, BT"

Both BT's have a 6" band of red paint, BT and LS signs and a brass washer stamped "PLS 1288" set at the base.

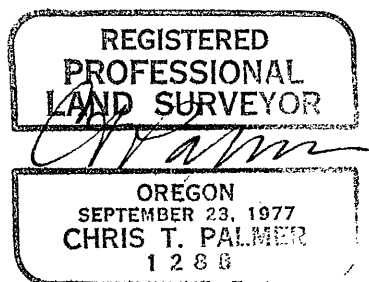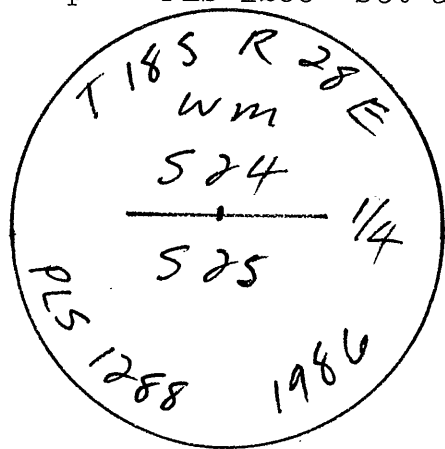

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 6 day of April, 1987
Robert D. Dwyer by _____
(COUNTY OFFICIAL) (DEPUTY)

GRANT COUNTY
SURVEY # 968