


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The original GLO survey was done by Henry W. Cooke under contract no. 494, dated January 16, 1884.

This corner was not set during the GLO survey.



Description of corner evidence found:

Nothing found.



Description of monument and accessories established to perpetuate the original location of this corner:

On 8/18/86, at the proportioned location, we set an all alum. monument, 2 1/2" dia. x 30" long, with a 3" dia. cap stamped "E1/16, S 24, S 25, T 18 S, R 28 E, PLS 1288, 1986", buried 24", 6" above the ground. Set a steel fence post 2' east of the corner with land survey and boundary signs.

A 6" w juniper bears S 62°44'E, 22.4 feet, scribed "E1/16, S 25, BT"

A 8" w juniper bears N 07°32'E, 68.8 feet, scribed "E1/16, S 24, BT"

Both BT's have a 6" band of red paint, BT and LS signs and a brass washer stamped "PLS 1288" set at the base.

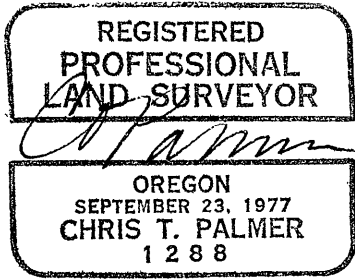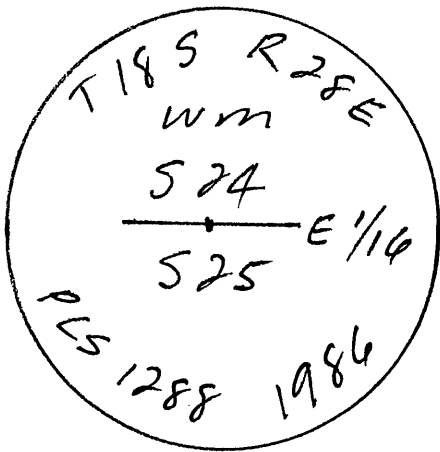

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 16 day of April, 1987
Robert D. Beatty (COUNTY OFFICIAL) Chris T. Palmer (DEPUTY)
GRANT COUNTY
SURVEY # 968