


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner established by: Henry W. Cooke, Deputy Surveyor,
under Contract No. 494, dated Jan. 16, 1884.

Surveyor General Record States: Set stone 16"x14"x12", 11 inches in
ground, for 1/4 section corner marked 1/4 on north face, dug pits
18"x18"x12" E. and W. of stone 5.5 feet dist. and raised mound of
earth 1.5 feet high 3.5 feet base alongside.

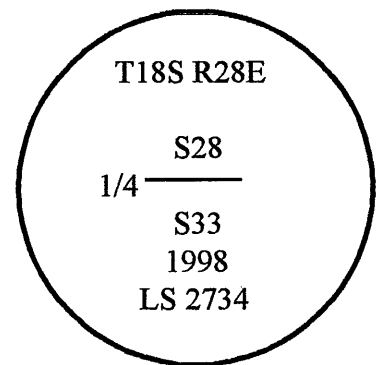

Description of corner evidence found:

Found stone 16x14x12 inches, marked 1/4.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Jack L. Watson

OREGON
SEPTEMBER 19, 1995
JACK L. WATSON
2734

RENEWAL DATE: 6/30/2000

Description of monument and accessories set at corner location:

I accept the marked corner stone position for this corner. I set a 2½"x30" aluminum pipe with
attached 3" aluminum cap, 16 inches in the ground, surrounded by a mound of stone. I buried the
original corner stone north and alongside the pipe. The cap is stamped as shown in the diagram.

From which I scribe new bearing trees:

A 7" Juniper bears N81°E, 93.19 feet, marked 1/4S28BT.

A 3" Juniper bears S27°E, 48.08 feet, marked XBT.

A 14" Juniper bears S7°E, 113.72 feet, marked 1/4S33BT.

A 3" Juniper bears N14°W, 54.75 feet, marked XBT.

I used an electronic total station, measuring the distance to a 50d nail driven in the side center at
the root crown of the BT's and true bearings to center of BT's.

Date: July 10, 1998

Witnesses: Cris Steinmetz

Office of Surveyor County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 15 day of July, 1998.
Robert D. Bayett by _____
(COUNTY OFFICIAL) (DEPUTY)