


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

T 18 S, R 29 E, WM

History of original corner establishment:

The original GLO survey was done by Bamford Robb under contract no. 366, dated August 18, 1880.



Description of corner evidence found:



This corner was not set under the GLO survey. Nothing found.

Description of monument and accessories I established to perpetuate the original location of this corner:

On 11/12/86, at the proportioned location, we set an all alum. mon. 2½" dia. x 30" long, with a ¾" cap stamped "E 1/16, S 6, S 7, T 18 S, R 29 E, 1986, PLS 1288", buried 24", 6" above the ground. Set steel fence posts 5' east and 3' south with land survey and boundary signs attached.

A 10" p pine bears N 71°19'E, 41.7 feet, scribed "E 1/16, S 6, BT"
A 8" p pine bears S 32°06'E, 18.9 feet, scribed "E 1/16, S 7, BT"

Both BT's have a 6" band of red paint, BT and LS signs, and a brass washer stamped "PLS 1288" set at the base.

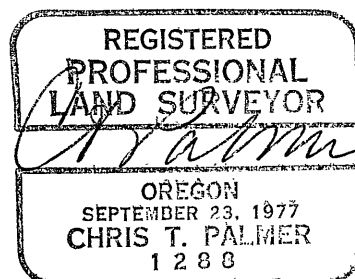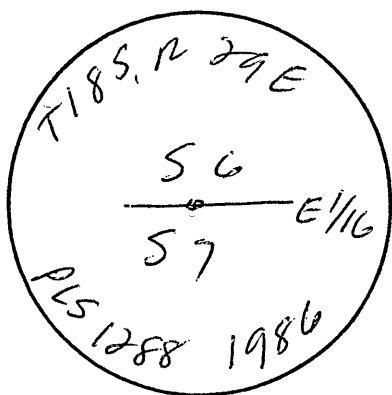

Office of SURVEYOR County of GRANT
State of OREGON I hereby certify that the within instrument was filed in this office
for record on the 6 day of apr, 1987
Ronald D. Bazzett by _____
(COUNTY OFFICIAL) (DEPUTY)

GRANT COUNTY
SURVEY # 968