

CERTIFIED RECORD OF LAND CORNER MONUMENTATION**History of original corner establishment:**

The original GLO survey was done by Bamford Robb under contract no. 386, dated August 18, 1880.

DIAGRAM

T 18 S, R 29 E
W M
N 1/16
S 7 C
C

Description of corner evidence found:

This corner was not set under the original GLO survey. Nothing found.



Description of monument and accessories established to perpetuate the original location of this corner:

On 11/13/86 at the proportioned location, we set an all alum. monument, 2 1/4" dia. x 30" long, with a 3" dia. cap stamped "N 1/16, C-C, S 7, T 18 S, R 29 E, WM, PLS 1288, 1986", buried 24", 6" above the ground. Set steel fence post 3' east and west with land survey and boundary signs attached.

A 4" p pine bears N 09°06'E, 5.0 feet, scribed "X"

A 14" p pine bears S 52°25'E, 36.0 feet, scribed "N 1/16, C-C, S 7, BT"

Both BT's have a 6" band of red paint, BT and LS signs and a brass washer stamped "PLS 1288" set at the base.

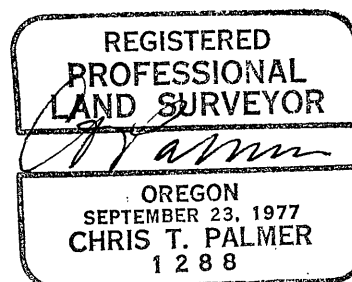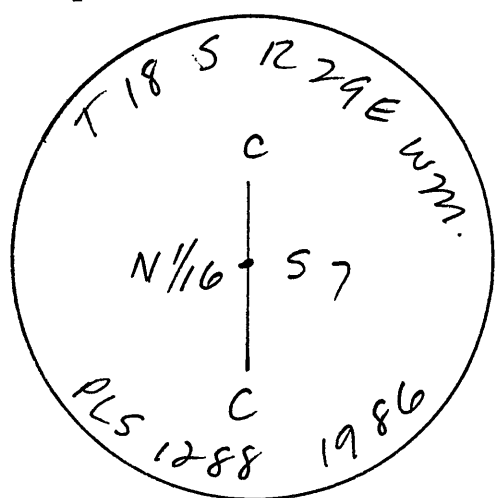

Office of SURVEYOR County of HAZARD
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 24 day of September, 1980
Robert D. Smith by Chris T. Palmer
(COUNTY OFFICIAL) (DEPUTY)

HAZARD COUNTY
SURVEY #968