


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The original GLO survey was done by Henry W. Cooke under contract no. 494, dated January 16, 1884.



Description of corner evidence found:



This corner was not set during the original GLO survey. Nothing found.

Description of monument and accessories | established to perpetuate the original location of this corner:

On 11/13/86 at the proportioned location werset an all alum. monument, 2 1/2" dia. x 30" long, with a 3" dia. cap stamped "NE 1/16, S 12, T 18 S, R 28 E, WM, PLS 1288, 1986", buried 24", 6" above the ground. Set steel fence posts 3' north and east with land survey and boundary signs attached.

A 8" w fir bears S 54°10'W, 17.1 feet, scribed "NE 1/16, S 12, BT"
A 6" w fir bears N 31°00'E, 2.7 feet, scribed "NE 1/16, S 12, BT"

Both BT's have a 6" band of red paint, BT and LS signs and a brass washer stamped "PLS 1288" set at the base.

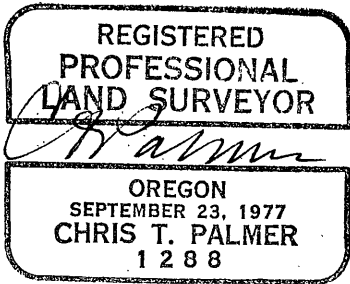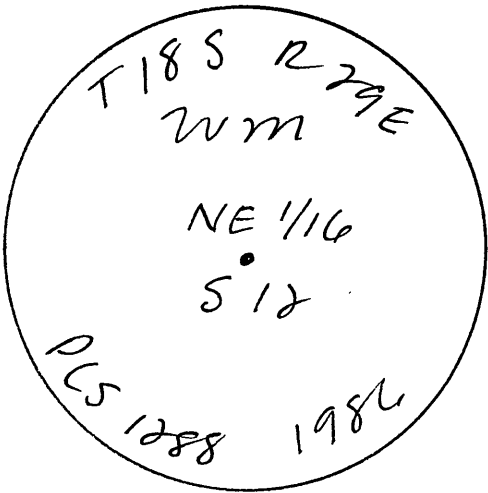

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 6 day of SEP, 1987
Robert D. Smith by _____
(COUNTY OFFICIAL) (DEPUTY)

GRANT COUNTY
SURVEY # 968