

CERTIFIED RECORD OF LAND CORNER MONUMENTATION**History of original corner establishment:**

The original GLO survey was done by Bamford Robb under contract no. 366, dated August 18, 1880.

DIAGRAM

T 18 S, R 29 E
WM
C 1/4
•
S 18

Description of corner evidence found:

This corner was not set under the original GLO survey. Nothing found.



Description of monument and accessories established to perpetuate the original location of this corner:

On 11/10/86 at the proportioned location, we set an all alum. monument, 2½" dia. x 30" long, with a 3" dia. cap stamped "C 1/4, S 18, T 18 S, R 29 E, WM, PLS 1288, 1986", buried 18", 12" above the ground in a stone mound. Set a steel fence post 3' north with land survey and boundary signs attached.

A 14" p pine bears S 47°30'W, 33.1 feet, scribed "C 1/4, S 18, BT"

A 10" w juniper bears S 72°05'E, 18.6 feet, scribed "C 1/4, S 18, BT"

Both BT's have a 6" band of red paint, BT and LS signs and a brass washer stamped "PLS 1288" set at the base.

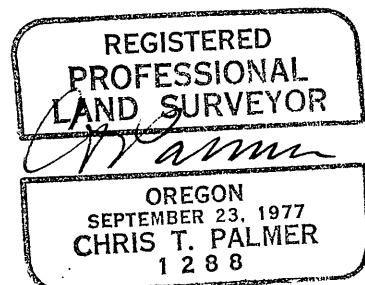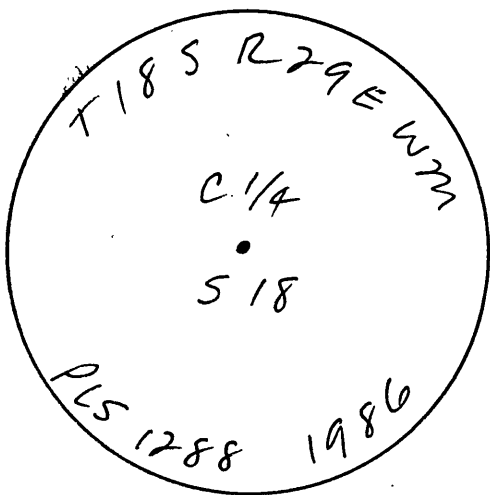

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 6 day of April, 1987
Robert D. Degett (COUNTY OFFICIAL) Chris T. Palmer (DEPUTY)

GRANT COUNTY
SURVEY #968