


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The original GLO survey was done by Bamfort Robb under contract no. 366, dated August 18.1880.

The original field notes state:

North, 40.0 chs, set a 16"x 10"x 6" stone in a stone mound for $\frac{1}{4}$ corner.

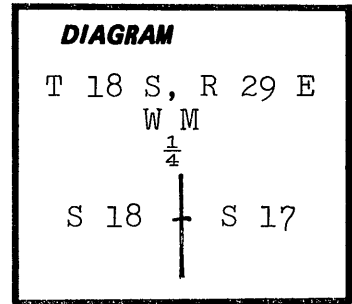

Description of corner evidence found:



Found a 16"x 11"xx5" stone marked "4" on a face inaa small stone mound.

Description of monument and accessories l established to perpetuate the original location of this corner:

On 8/22/86, at the location of the marked stone, we set anlall alum. monument, $2\frac{1}{4}$ " dia. x 30""long, with a 3" cap stamped " $\frac{1}{4}$, S 18, S 17, T 18 S, R 29 E, PLS 1288, 1986", buried 24", 6" above the ground in a stone mound. Set a steel fence post with a land survey sign 1' east of the corner.

A 6" w juniper bears S $41^{\circ}45'$ E, 138.1 feet, scribed " $\frac{1}{4}$, S 17, BT"
A $\frac{5}{8}$ " iron pin bears S $54^{\circ}23'$ W, 16.22 feet

The BT has a 6" band of red paint, BT and LS signs and a brass washer stamped "PLS 1288" set at the base. The iron pin has a $1\frac{1}{2}$ " alum. cap stamped "RM, PLS 1288, MAPS, 1986".

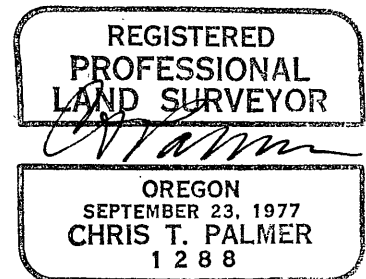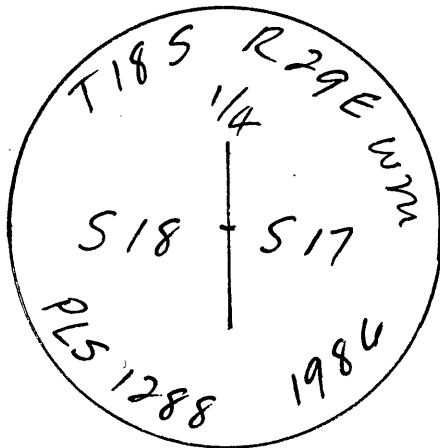

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 6 day of April, 1987
Robert D. Banta by _____
(COUNTY OFFICIAL) (DEPUTY)

GRANT COUNTY
SURVEY # 968