

CERTIFIED RECORD OF LAND CORNER MONUMENTATION**History of original corner establishment:**

The original GLO survey was done by bamford Robb under contract no. 366, dated August 18, 1880.

DIAGRAM

T 18 S,	R 29 E
W M	
	C
S 1/16	+
	C
	S 18

Description of corner evidence found:



This corner was not set under the original GLO survey. Nothing found.

Description of monument and accessories | established to perpetuate the original location of this corner:

On 11/10/86 at the proportioned location we set an all alum. monument, 2½" dia. x 30" long, with a 3" dia. cap stamped "S 1/16, C-C, S 18, T 18 S, R 29 E, WM, PLS 1288, 1986", buried 24", 6" above the ground. Set a steel fence post 3' south with land survey and boundary signs attached.

A 12" w juniper bears S 78°15'W, 17.8 feet, scribed "S 1/16, S 18, C-C, BT"
A 6" w juniper bears N 29°00'W, 41.3 feet, scribed "S 1/16, S 18, C-C, BT"

Both BT's have a 6" band of red paint, BT and LS signs and a brass washer stamped "PLS 1288" set at the base.

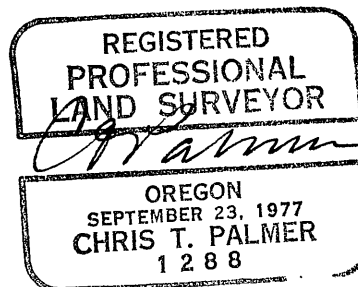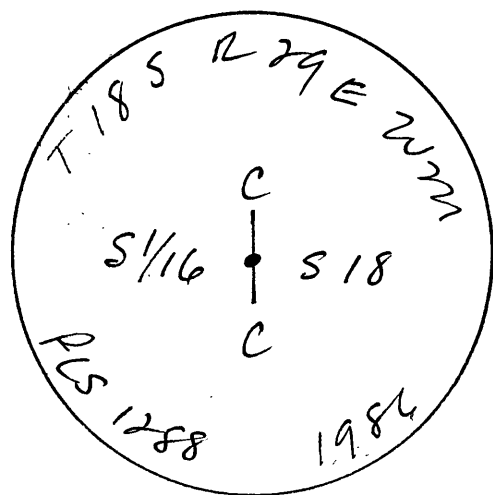

GRANT COUNTY
SURVEY # 968

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 6 day of SEP, 1987
Robert D. Begett by _____
(COUNTY OFFICIAL) (DEPUTY)